




Door Components

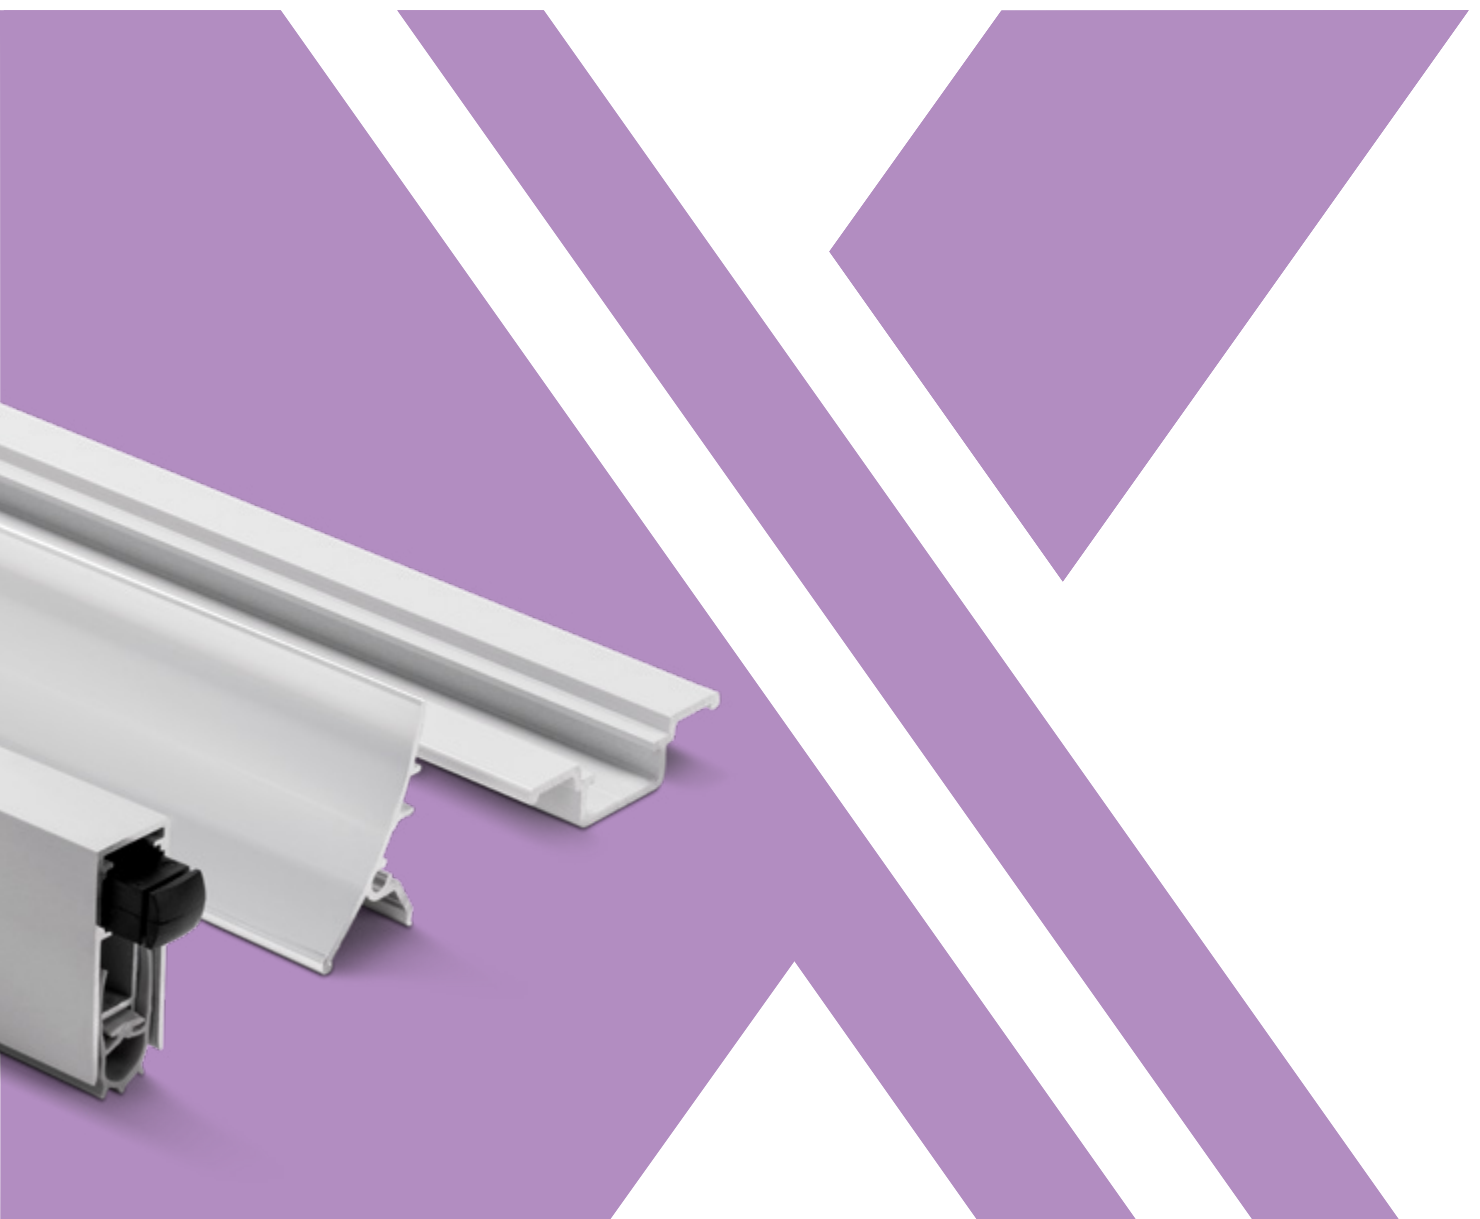

Exitex Door Components are engineered to enhance and complete the door assembly — integrating sealing, protection and safety solutions within a structured system approach.

The range supports composite, PVC, timber, aluminium and security / steel doors, with configurations covering acoustic and fire and smoke applications where specified. Suitable for both inward and outward opening designs.

Drop Seals

Concealex drop seals for high performance automatic sealing at the door base.
Self-levelling and adjustable, performance tested for fire, smoke and acoustic.

Door Surrounds & Perimeter Sealing

Perimeter sealing offer additional protection against draughts, smoke and noise.

Composite Door Accessories

Accessories engineered for composite door assemblies.
Lock and Hinge edges for enhanced edge protection and strength, offering a professional finish.

Finger Protection Systems

Finger protection systems engineered to reduce trapping risk.
Front and rear options, including heavy-duty and concealed fixing.



Wheelchair Friendly



Moderate Exposure



Severe Exposure



Part M Approved

Aluminium
Hardened High Tensile to
BS 1474

EPDM
Rubber Gaskets to
BS 4255

Powder Coating
60-80 Micrometres to
BS 6496

Anodising
15-25 Micrometres to
BS 3987

Cellular EPDM
Rubber to
SS 243705A1, SS81813

PVC
Gaskets to
BS 7412

Contents

Drop Seals	4
Deflectors	8
Deflectors / Garage Door Seals	10
Garage Door Seals	11
Stable Door Kit	12
Lock Edge Profiles	13
PVC Lock & Hinge Edge Profiles	14
Hinge Edge Profiles	15
Double Door Rebate Lock Set	16
Door Surrounds	18
Roller Finger Guards	23
Finger Guards	24
Industrial Brushstrips	25
Roller Shutter Components	26

COMPLETE PROTECTION. EVERY EDGE.

Durable door protection components that help extend the life of your doors, improve safety and reduce maintenance.


-  **PROTECTS DOORS FROM DAMAGE**
-  **ENHANCES SAFETY FOR OCCUPANTS**
-  **REDUCES REPAIRS & MAINTENANCE**
-  **IDEAL FOR HIGH TRAFFIC ENVIRONMENTS**



LOCK EDGE PROTECTION
Shields the lock edge from impact, damage and wear.

HINGE EDGE PROTECTION
Helps protect the hinge edge from impact and wear.



BRUSH STRIP
Helps seal the bottom of the door to block light, air, smoke, dust and insects.

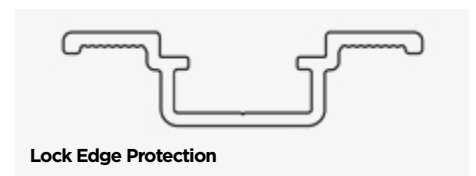

Concealex A8100

1.50.0031



- Application: suitable for all types of single action doors
- Maximum drop 14mm
- Fixing: with screws supplied
- Adjustment: standard phillips screwdriver
- Self-levelling
- Co-extruded bubble seal in self-extinguishing PVC
- Fire Tested: for 30 & 60 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested: to BS EN 1634-3:2004
- Acoustic Tested: up to 44dB to BS EN ISO 10140-2:2010
- In sizes: 330mm, 426mm, 526mm, 626mm, 726mm, 826mm, 926mm, 1026mm, 1130mm, 1230mm, 1330mm and 1430mm
- Available in SAA
- Trimming lengths - (on the opposite side to the plunger)
330mm & 426mm can be trimmed by up to 50mm only
526mm and above - can be trimmed by up to 150mm

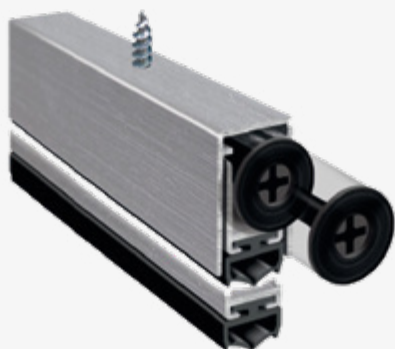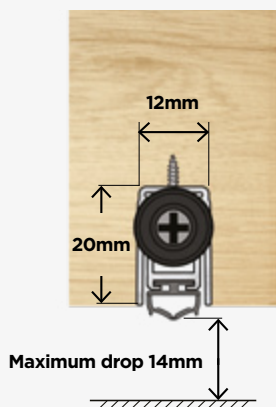

Concealex A8100 Superior

1.50.0005

- Application: suitable for all types of single action doors
- Maximum drop 17mm
- Fixing: with stainless steel bracket
- Adjustment: plunger with adjustable spring
- Self-levelling
- Sound insulating seal in co-extruded tubular TPE
- Fire Tested: for 30 & 60 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested: to BS EN 1634-3:2004
- Acoustic Tested: up to 44dB to BS EN ISO 10140-2:2010
- In sizes: 330mm, 426mm, 526mm, 626mm, 726mm, 826mm, 926mm, 1026mm, 1130mm, 1230mm, 1330mm and 1430mm
- Available in SAA
- Trimming lengths - (on the opposite side to the plunger)
330mm - can be trimmed by up to 20mm only
426mm - can be trimmed by up to 50mm only
526mm and above - can be trimmed by up to 150mm

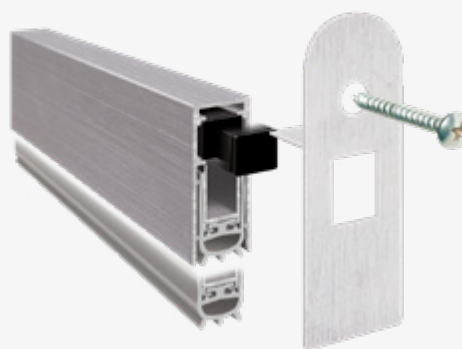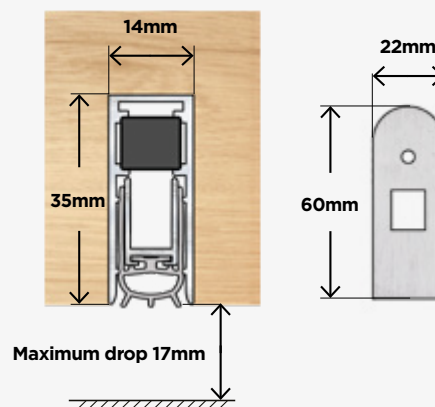


Concealex Facefix


1.50.0010

1.12.0700

**Facefix Bumper Kit available
to allow fitting of Dropseal
on inside of door**




- Application: suitable for all types of single action doors
- Maximum drop 14mm
- Fixing: surface mounted screw fix with aluminium clip on cover with nylon cap
- Plunger adjustable with a 3mm Allen Key
- Self-levelling
- Co-extruded bubble seal in self-extinguishing PVC
- Fire Tested for 30 & 60 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested: to BS EN 1634-3:2001
- Acoustic Tested: up to 43DB to BS EN ISO 10140-2:2010
- In sizes 330mm, 430mm, 530mm, 630mm, 730mm, 830mm, 930mm, 1030mm, 1130mm, 1230mm, 1330mm
- Available in SAA
- Trimming lengths - (on the opposite side to the plunger)
330mm, 430mm & 530mm - can be trimmed by up to 50mm only
630mm and above - can be trimmed by up to 150mm

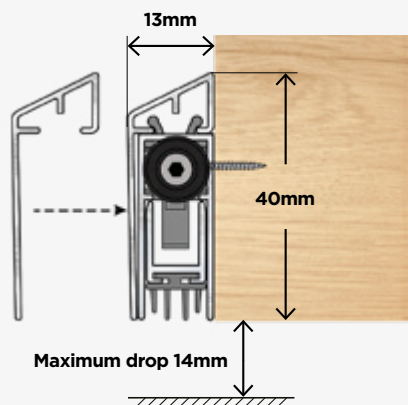

Concealex Slimline Facefix

1.50.0008


- Application: suitable for all types of single action doors
- Maximum drop 15mm
- Fixing: surface mounted screw fix with PVC clip on cover
- Adjustment: standard phillips screwdriver
- Self-levelling
- Sound insulating Silicone Rubber seal
- Fire Tested for 60 min to BS EN 1634-1:2014
- In size: 830mm, 930mm, 1030mm
- Available in SAA
- Trimming lengths: up to 100mm on the opposite side to the plunger

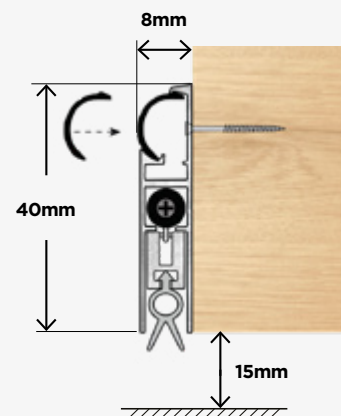

Concealex 13mm x 28mm

1.50.0080


- Application: suitable for all types of single action doors
- Maximum drop 14mm
- Fixing: with screws supplied
- Plunger adjustable with a 3mm Allen Key
- Self-levelling
- Sound insulating bubble seal in co-extruded TPE
- Fire Tested for 30 & 60 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested To BS EN 1634-3:2004
- Acoustic Tested
- In sizes: 330mm, 426mm, 526mm, 626mm, 726mm, 826mm, 926mm, 1026mm, 1130mm, 1230mm, 1330mm and 1430mm
- Available in SAA
- Trimming Lengths - (on the opposite side to the plunger)
330mm, 426mm & 526mm - can be trimmed by up to 50mm only
626mm and above - can be trimmed by up to 150mm

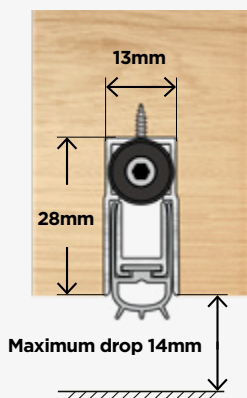

Concealex 15mm x 28mm

1.50.0060



- Application: suitable for all types of single action doors
- Maximum drop 14mm
- Fixing: with screws supplied
- Plunger adjustable with a 3mm Allen Key
- Self-levelling
- Sound insulating bubble seal in co-extruded TPE
- Fire Tested for 30 & 60 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested To BS EN 1634-3:2004
- Acoustic Tested
- In sizes: 330mm, 426mm, 526mm, 626mm, 726mm, 826mm, 926mm, 1026mm, 1130mm, 1230mm, 1330mm and 1430mm
- Available in SAA
- Trimming Lengths - (on the opposite side to the plunger)
330mm, 426mm & 526mm - can be trimmed by up to 50mm only
626mm and above - can be trimmed by up to 150mm

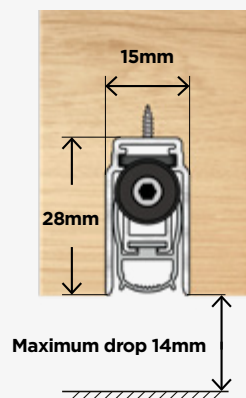

Concealex Facefix for Glass Doors

1.50.0036


- Application: for swing glass doors
- Maximum drop 15mm
- Fixing: with high strength Double Sided Tape
- Self levelling
- Co-extruded bubble seal in self-extinguishing PVC
- In sizes: 826mm, 926mm, 1026mm
- Available in SAA
- Trimming Lengths: up to 115mm on the opposite side to the plunger

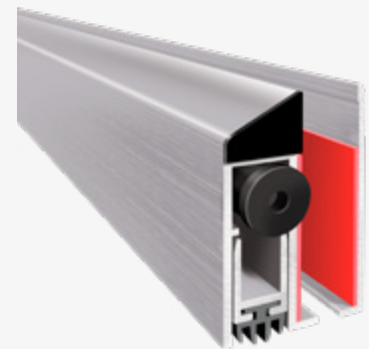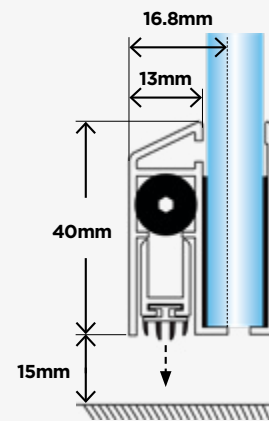

Decoration
Cover




Press support

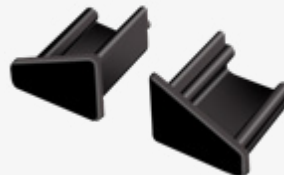

L & R endcap




Lower endcap

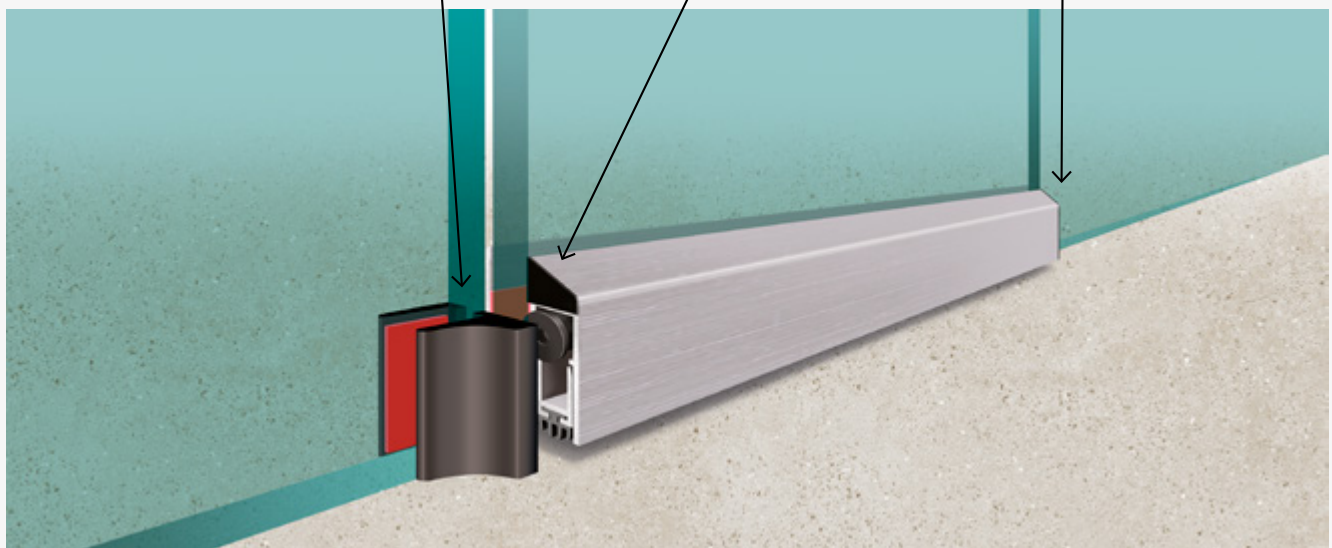

Deflector 20

1.01.0110


- For inward and outward opening doors
- Designed to deflect water away from the door bottom
- Pre drilled holes
- Quick and easy to fit
- Supplied with endcaps - no sharp corners or raw edges
- Can be used in conjunction with a threshold
- In sizes 914mm to 3000mm
- Available in mill, gold, white and black

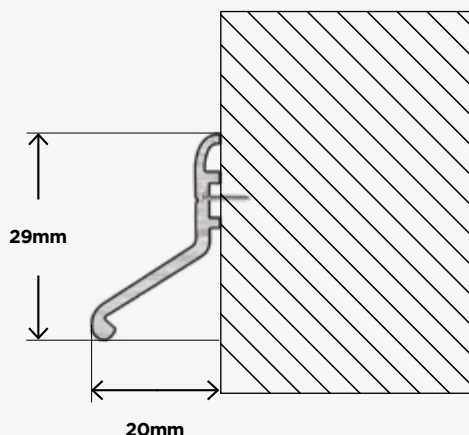

Conceal Fix Expelex MK2

1.01.0144


- For inward and outward opening doors
- No visible fixings
- Push fit onto fixing buttons
- Designed to deflect water away from the door bottom
- Quick and easy to fit
- Supplied with endcaps - no sharp corners or raw edges
- Can be used in conjunction with a threshold
- In size 914mm
- Available in black, gold, green, chartwell green, grey RAL 7016, mill, white, bright silver, red RAL 3011, plum RAL 4007, grey RAL 7015, agate grey RAL 7038, silver grey RAL 7011, grey RAL 7035, midnight, sky blue

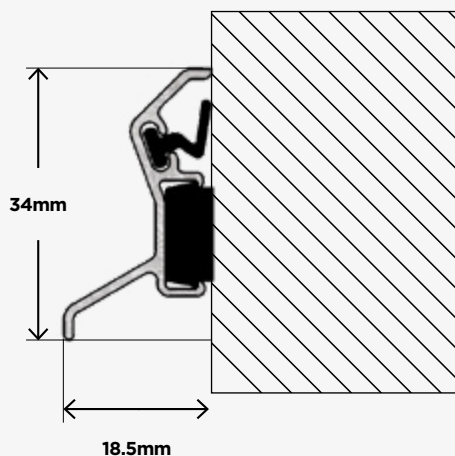

Radius Concealed Screw Fix Deflector

1.01.0148

- For inward and outward opening doors
- No visible fixings
- Designed to deflect water away from the door bottom
- Pre drilled holes
- Quick and easy to fit
- Supplied with endcaps - no sharp corners or raw edges
- Can be used in conjunction with a threshold
- In sizes 914mm to 3000mm
- Available in mill, gold, black, green, red, blue, white, slate grey, anthracite grey, chartwell green and brushed steel

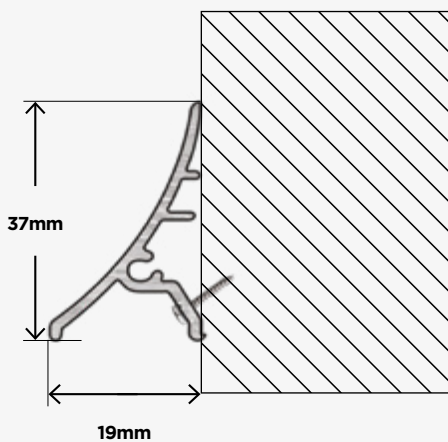


Expelex

1.01.0145 with seal

1.01.0146 without seal

- For inward and outward opening doors
- Designed to deflect water away from the door bottom
- Pre drilled holes
- Quick and easy to fit
- Supplied with endcaps - no sharp corners or raw edges
- Can be used in conjunction with a threshold
- In sizes 914mm to 3000mm
- Available in mill, gold, white and black

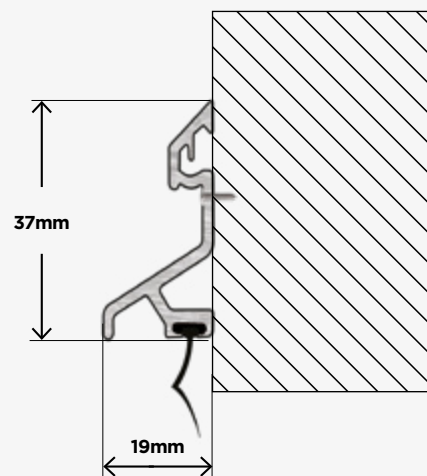


ERD MK2 Rain Deflector

1.01.0132 with seal

1.01.0130 without seal


- For use in more exposed locations
- For inward and outward opening doors
- Designed to deflect water away from the door bottom
- Pre drilled holes
- Quick and easy to fit
- Supplied with endcaps - no sharp corners or raw edges
- Can be used in conjunction with a threshold
- In sizes 914mm to 3000mm
- Available in mill and gold

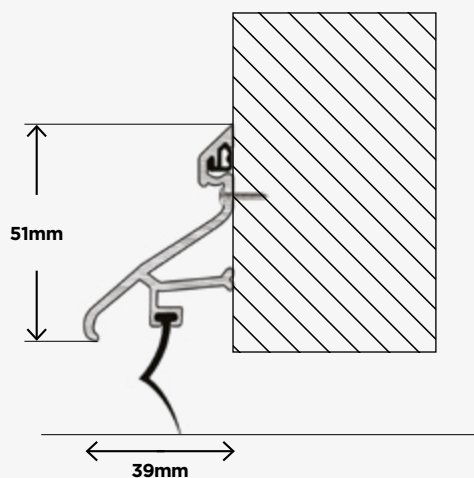

Garex

1.01.0163


- Suitable for swing doors and up and over garage doors
- Suitable for steel, timber or composite doors
- No need to remove doors
- Easy to fit, self piercing screws provided
- Externally fitted
- Does not restrict door movement
- Forms an effective draught seal and stops dust, leaves and insects. Deters rodents from entering
- Blade is reversible for doors that open inward
- In sizes 914mm to 3000mm
- Available in mill, gold, black and white

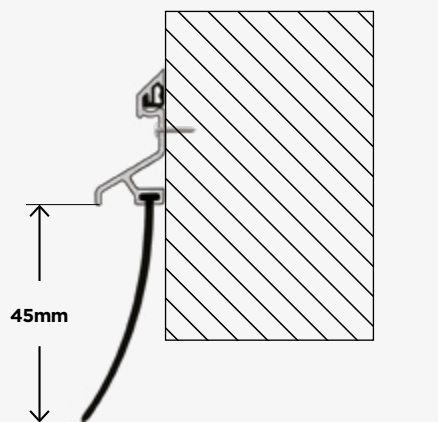

Garin

1.01.0160


- Suitable for swing doors and up and over garage doors
- Suitable for steel, timber or composite doors
- No need to remove doors
- Easy to fit, self piercing screws provided
- Internally fitted
- Does not restrict door movement
- Forms an effective draught seal and stops dust, leaves and insects. Deters rodents from entering
- Blade is reversible for doors that open inward
- In sizes 914mm to 3000mm
- Available in mill, gold and black

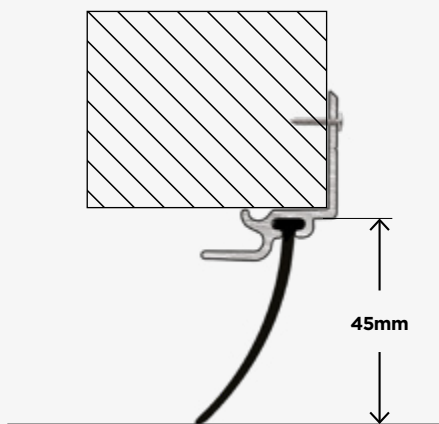

GIFS

1.01.0185

- Suitable for swing doors and up and over garage doors
- Suitable for steel, timber or composite doors
- No need to remove doors
- Easy to fit, self piercing screws provided
- Can be internally or externally fitted
- Does not restrict door movement
- Forms an effective draught seal and stops dust, leaves and insects. Deters rodents from entering
- Blade is reversible for doors that open inward
- In sizes 914mm to 3000mm
- Available in mill

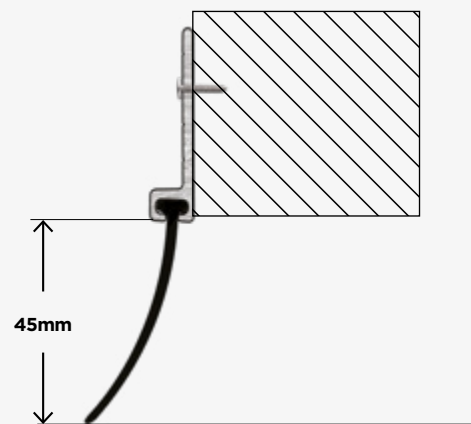


Stable Door Kit

1.01.0965

- Stable Door Kit consists of:

- A** Conceal Fix Expelex (914mm x 2 pieces)
- B** Double Door Centre Seal 16mm (914mm x 2 pieces)


- Prevents rain and draughts where the stable door meets in the centre
- Conceal Fix Expelex deflect the water away from both door panels
- The Double Door Centre Seal creates a rain and draught seal between the two doors
- Endcaps prevent sharp corners and raw edges
- Available in mill, gold, white, black, blue, green and red

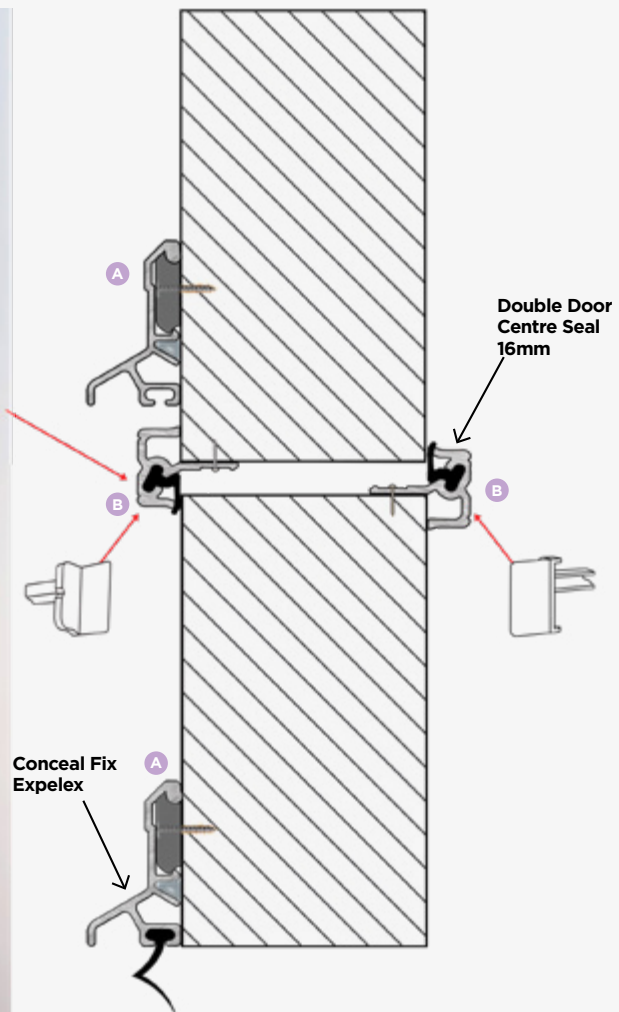

Aluminium

LE5 V5 /44/16


- For 16mm Lock Face Plate
- Fits to the lock side of a composite door to cover the edges after machining
- Can be fabricated to suit all locks
- Prevents doors from bowing
- Easy to install
- Protects door edges from damage
- Hinge Side protection also available
- In size 2100mm
- Available in white RAL 9016, brown RAL 8017, grey RAL 7016

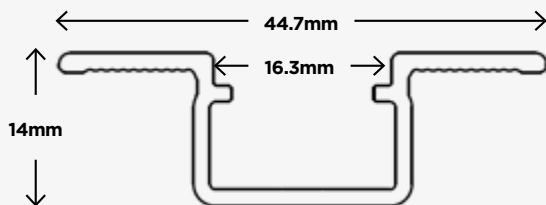

Aluminium

LE6 V3 /44/20


- For 20mm Lock Face Plate
- Fits to the lock side of a composite door to cover the edges after machining
- Can be fabricated to suit all locks
- Prevents doors from bowing
- Easy to install
- Protects door edges from damage
- Hinge Side protection also available
- In size 2100mm
- Available in white RAL 9016, brown RAL 8017, brown RAL 8003, brown RAL 8001, black RAL 9005, grey RAL 7016

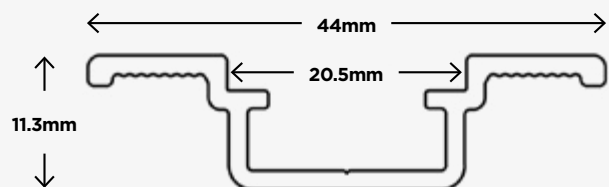

Aluminium

LE19/44/20


- For 20mm Lock Face Plate
- Fits to the lock side of a composite door to cover the edges after machining
- Can be fabricated to suit all locks
- Prevents doors from bowing
- Easy to install
- Protects door edges from damage
- Hinge Side protection also available
- In size 2100mm
- Available in white RAL 9010

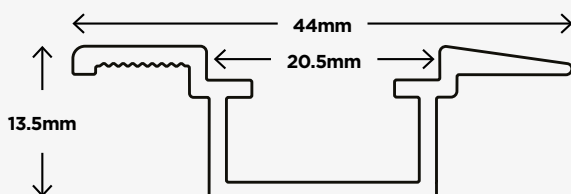

Aluminium

LE21/44/20


- For 20mm Lock Face Plate
- Fits to the lock side of a composite door to cover the edges after machining
- Can be fabricated to suit all locks
- Prevents doors from bowing
- Easy to install
- Protects door edges from damage
- Pile groove for increased door performance
- In size 2100mm
- Available in white RAL 9016, brown RAL 8017, brown RAL 8003, black RAL 9005, grey RAL 7016

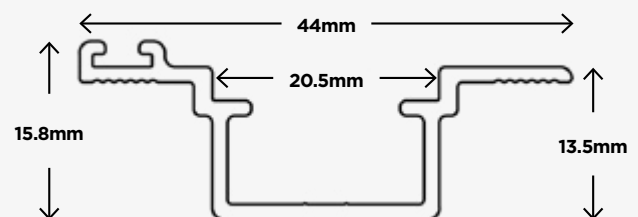

PVC

LE9/44/16


- For 16mm Lock Face Plate
- Fits to the lock side of a composite door to cover the edges after machining
- Can be fabricated to suit all locks
- Enhances the aesthetic appearance
- Easy to install
- Protects door edges from damage
- Hinge Side protection also available
- In size 2100mm
- Available in white

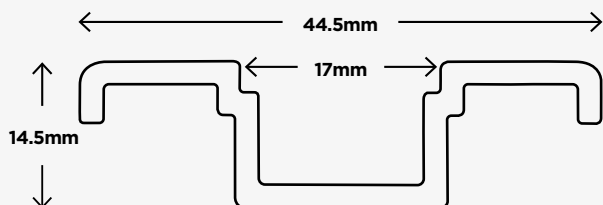

PVC

LE10/44/20


- For 20mm Lock Face Plate
- Fits to the lock side of a composite door to cover the edges after machining
- Can be fabricated to suit all locks
- Enhances the aesthetic appearance
- Easy to install
- Protects door edges from damage
- Hinge Side protection also available
- In size 2100mm
- Available in white

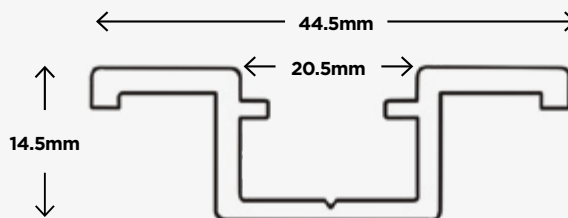

PVC Infill Clip

1.10.0860


- For 20mm Lock Face Plate
- Hides fixings and closes off gap on lock edge
- Easy to install
- In size 2100mm or cut to size with punched radius end
- Available in white or brown

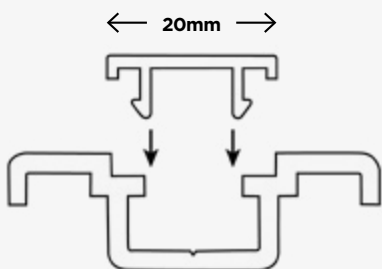

PVC

HE12/PVC


- Suitable for 44mm door
- Fits to the hinge side of a composite door to cover the edges after machining
- Can be fabricated to suit all hinges
- Enhances the aesthetic appearance
- Easy to install
- Protects door edges from damage
- Lock Side protection also available
- In size 2100mm
- Available in white RAL 9016

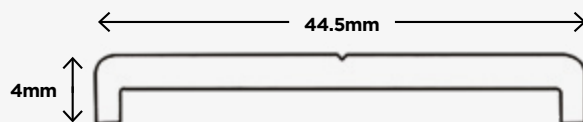

Aluminium

HE3/44


- Suitable for 44mm door
- Fits to the hinge side of a composite door to cover the edges after machining
- Can be fabricated to suit all hinges
- Reinforces door security and stability
- Easy to install
- Protects door edges from damage
- Prevents doors from bowing
- Lock Side protection also available
- In size 2100mm
- Available in white RAL 9016, brown RAL 8017, mill

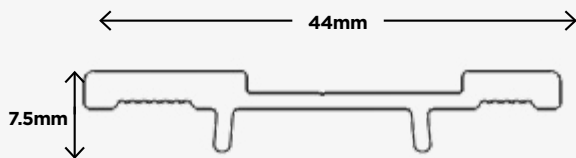

Aluminium

HE4/44


- Suitable for 44mm door
- Fits to the hinge side of a composite door to cover the edges after machining
- Can be fabricated to suit all hinges
- Reinforces door security and stability
- Easy to install
- Protects door edges from damage
- Prevents doors from bowing
- Lock Side protection also available
- In size 2100mm
- Available in white RAL 9016

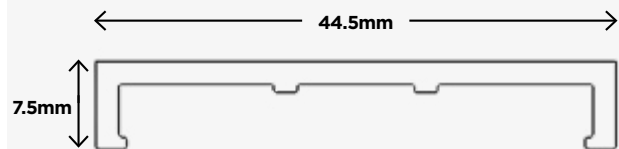

Aluminium

HE6/44


- Suitable for 44mm door
- Fits to the hinge side of a composite door to cover the edges after machining
- Can be fabricated to suit all hinges
- Reinforces door security and stability
- Easy to install
- Protects door edges from damage
- Prevents doors from bowing
- Lock Side protection also available
- In size 2100mm
- Available in white RAL 9016, brown RAL 8017, black RAL 9005, grey RAL 7016

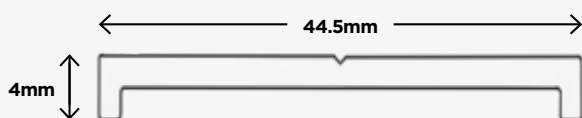

Aluminium

HE8/44



- Suitable for 44mm door
- Fits to the hinge side of a composite door to cover the edges after machining
- Can be fabricated to suit all hinges
- Reinforces door security and stability
- Easy to install
- Protects door edges from damage
- Prevents doors from bowing
- Lock Side protection also available
- In size 2100mm
- Available in white RAL 9016, brown RAL 8003, brown RAL 8016, brown RAL 8017, black RAL 9005, grey RAL 7016



Aluminium

Winkhaus Double Door Rebate Lock Set


- Suitable for 44mm Door Slabs
- Creates a rebated centre for composite doors
- Reinforces door security and stability
- Protects door edges from damage
- Can be fabricated to suit Winkhaus FGTE and FAB locks
- In size 2100mm
- Available in mill, black, white, brown, blue, green, red, clay brown and grey

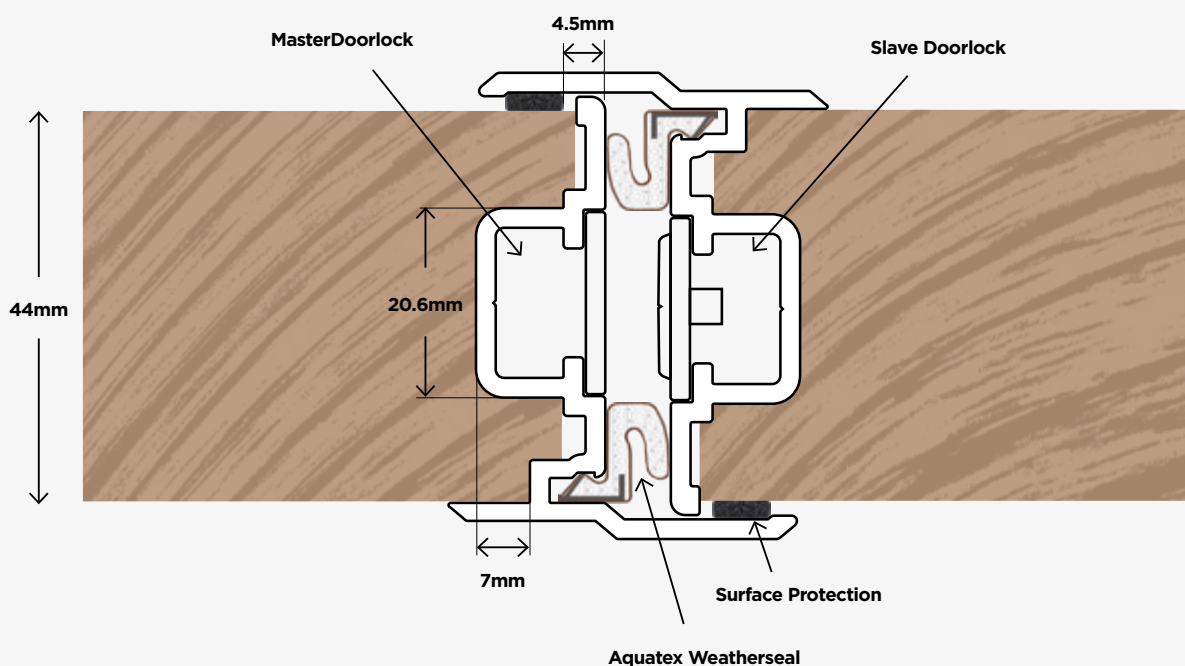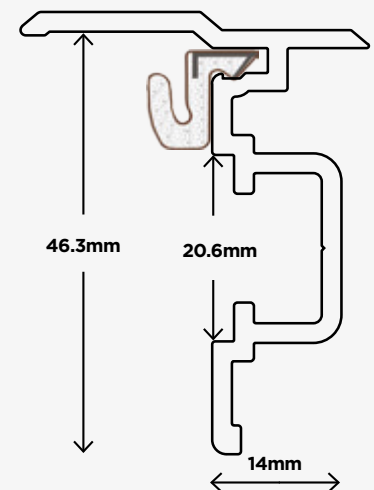

Aluminium

Universal Double Door Rebate Lock Set

- Suitable for 44mm Door Slabs
- Creates a rebated centre for composite doors
- Reinforces door security and stability
- Protects door edges from damage
- Can be fabricated to suit all locks
- In size 2100mm
- Available in mill, black, white, brown, blue, green, red, clay brown and grey

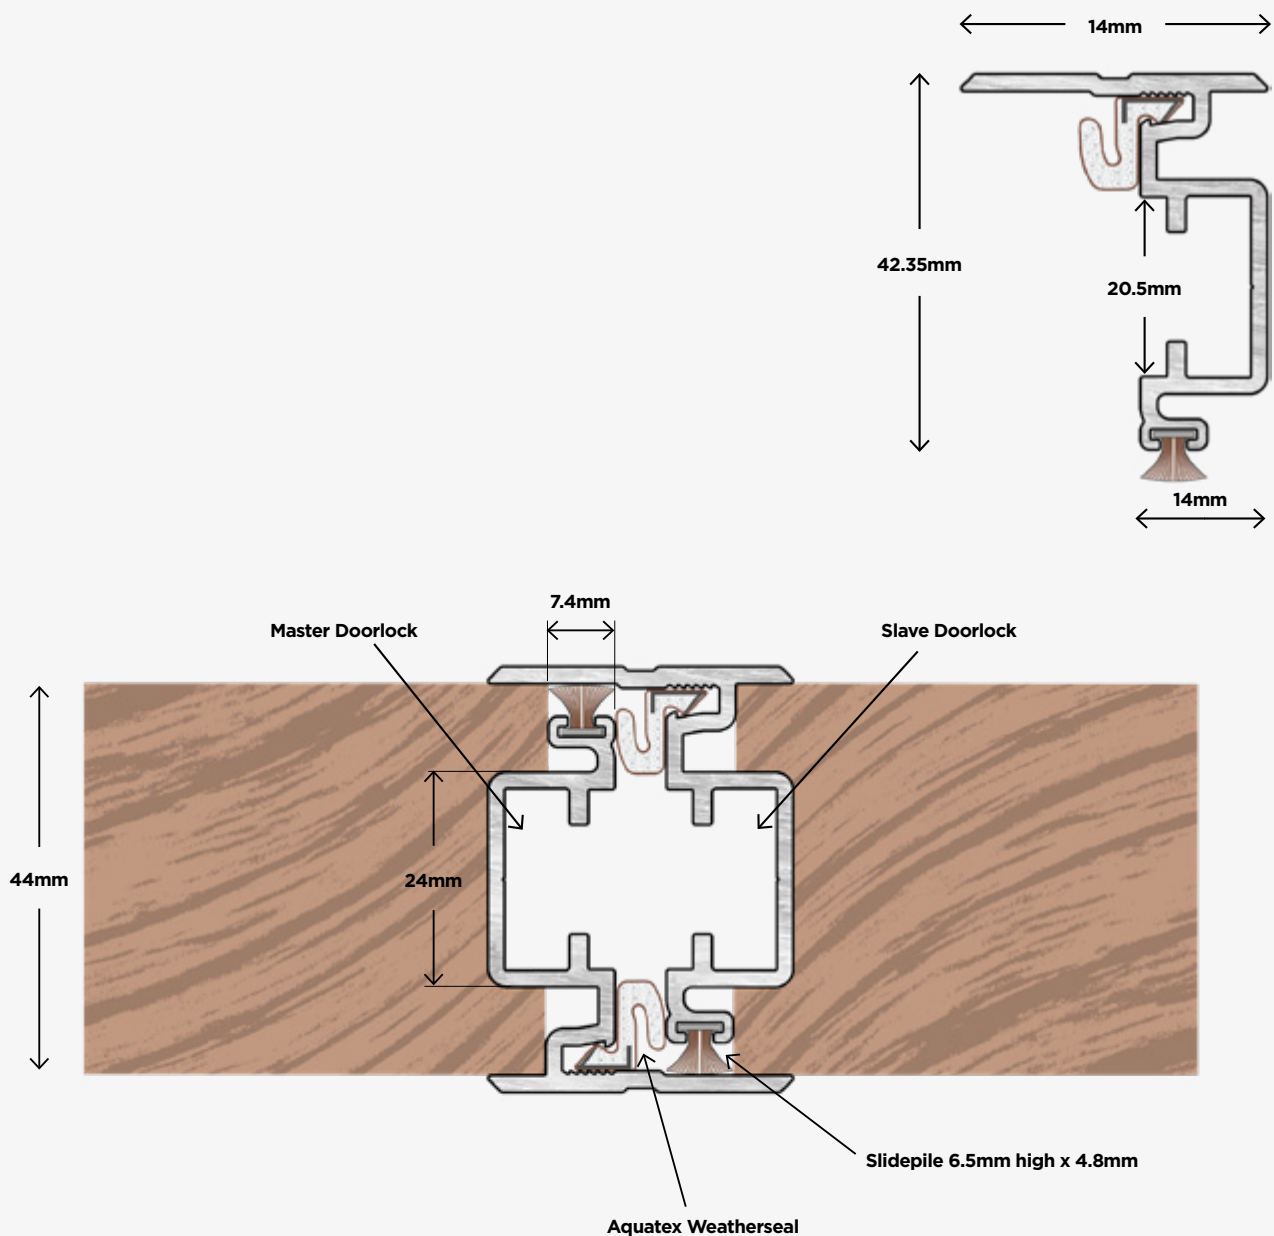


Standard Door Surround

1.01.0400 Screw Fix

1.01.0401 Pin Fix

- An aluminium carrier with a tough flexible weather energised gasket- allows for 3mm for door movement
- An excellent product for weatherproofing around doors and windows
- Can be used as a cold smoke seal
- Stainless steel screw slot, fixing for adjustment
- Can be cut to size
- In Sizes 914mm, 2134mm, 2439mm, 5180mm - (1 x 914mm + 2 x 2134mm lengths)
6090mm - (1 x 1220mm + 2 x 2439mm lengths)
- Available in mill, gold, bronze, black and white

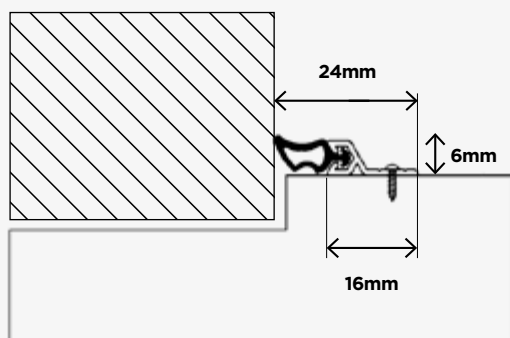


Flex 'n' Seal

1.01.0150 Screw Fix

1.01.0151 Pin Fix

- An aluminium carrier with a tough flexible weather energised gasket- allows for 3mm for door movement
- An excellent product for weatherproofing around doors and windows
- Can be used as a cold smoke seal
- Stainless steel screw slot, fixing for adjustment
- Can be cut to size
- In Sizes 914mm, 2134mm, 2439mm, 5180mm - (1 x 914mm + 2 x 2134mm lengths)
6090mm - (1 x 1220mm + 2 x 2439mm lengths)
- Available in mill, gold, bronze, black and white

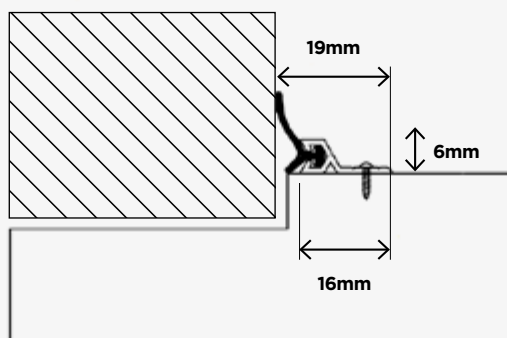


QDS

1.01.0415

Pin Fix

- Aluminium carrier with Polyurethane foam gasket
- Allows for 3mm of door movement
- An excellent product for weatherproofing around doors and windows
- Can be used as a cold smoke seal
- Stainless steel pin fixing
- Can be cut to size
- In Sizes 914mm, 2134mm, 2439mm, 5180mm - (1 x 914mm + 2 x 2134mm lengths)
- Available in mill and gold


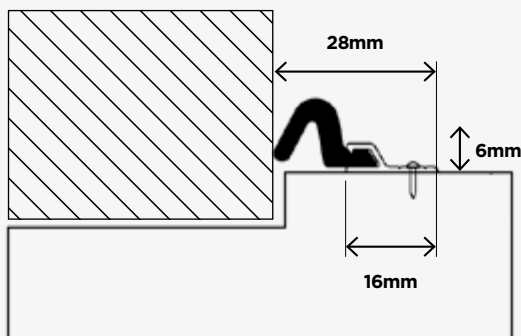


Windor

1.01.0455

Pin Fix

- Dualhard PVC door surround
- An excellent product for weatherproofing around doors and windows
- Can be used as a cold smoke seal
- Stainless steel pin fixing
- Can be cut to size
- In Sizes 914mm, 2134mm, 5180mm - (1 x 914mm + 2 x 2134mm lengths)
- Available in white and brown

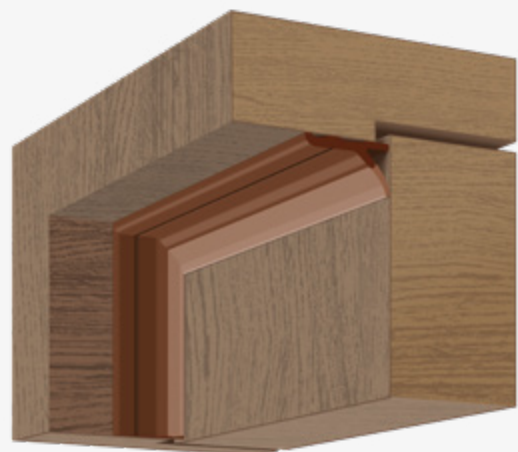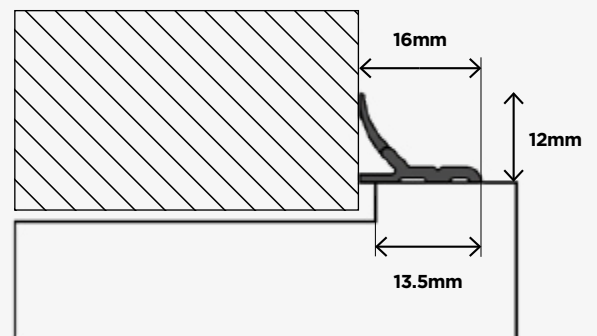


PVC Pile Weather Set

1.01.0345

Pin Fix

- PVC carrier with polypropylene pile
- An excellent product for weatherproofing around doors and windows
- Can be used as a cold smoke seal
- Stainless steel pin fixing
- Can be cut to size
- In Sizes 914mm, 2134mm, 5180mm - (1 x 914mm + 2 x 2134mm lengths)
- Available in white and brown

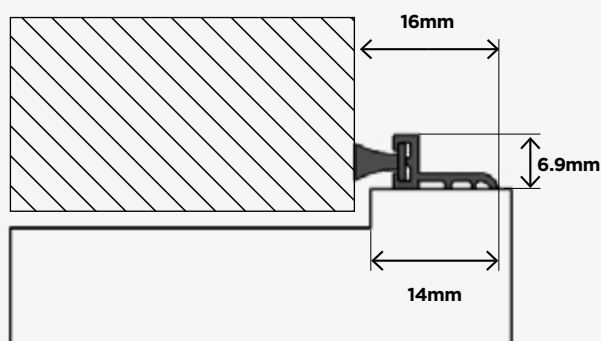


QBS External

1.22.0001

Pin Fix

- For external doors
- PVC Carrier with polyurethane foam gasket
- An excellent product for weatherproofing around doors and windows
- Can be used as a cold smoke seal
- Stainless steel pin fixing
- Can be cut to size
- In sizes 2030mm & 5180mm
- Available in brown and white

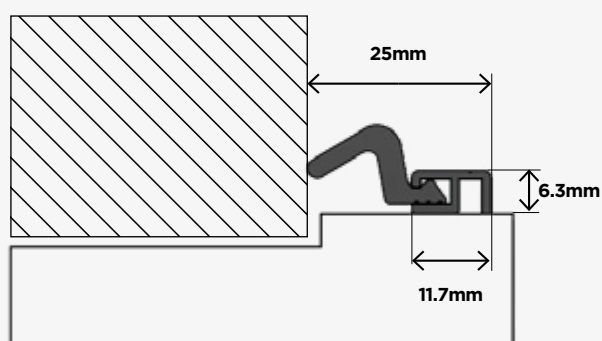


QBS Internal

1.22.0003

Pin Fix

- For Internal Doors
- PVC Carrier with polyurethane foam gasket
- An excellent product for weatherproofing around doors and windows
- Can be used as a cold smoke seal
- Stainless steel pin fixing
- Can be cut to size
- In sizes 2030mm & 5180mm
- Available in brown and white

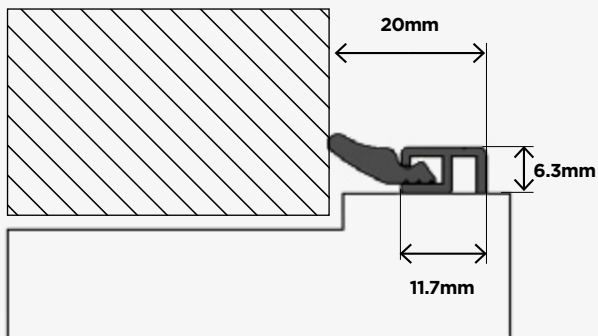


Bladex

1.01.0019

Screw Fix


- An aluminium carrier with a tough flexible PVC gasket
- An excellent product for weatherproofing at the bottom of doors
- Can be used as a cold smoke seal
- Stainless steel screw slot, fixing for adjustment
- Can be cut to size
- In size 914mm
- Available in mill, gold and brown

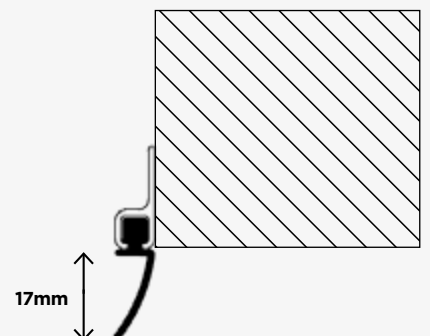

Double Door Centre Seal 16mm

1.01.0105



- Suitable for inward and outward stable doors
- Aluminium Carrier with EPDM rubber seal
- No need for rebating
- Neat finish
- Eliminates draught and rain
- Concealed Fixings
- Caters for variable gaps
- Endcaps supplied
- In sizes: 914mm, 1200mm, 2400mm
- Available in gold, mill, bright silver, white RAL 9010, black, brown RAL 8040, red, blue, green, chartwell green, grey RAL 7016

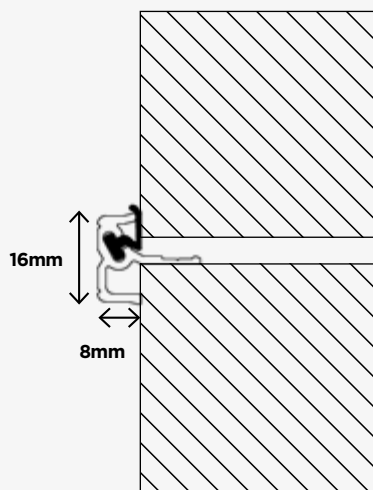

Double Door Centre Seal 30mm

1.01.0106

- Suitable for inward and outward stable doors
- Aluminium Carrier with EPDM rubber seal
- No need for rebating
- Neat finish
- Eliminates draught and rain
- Concealed Fixings
- Caters for variable gaps
- Endcaps supplied
- In sizes: 914mm, 1200mm, 2400mm
- Available in gold, mill, white RAL 9010, black, red, blue, green, grey RAL 7016

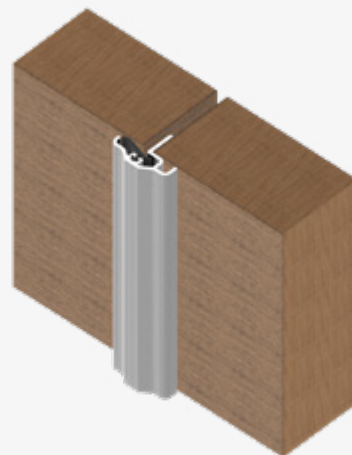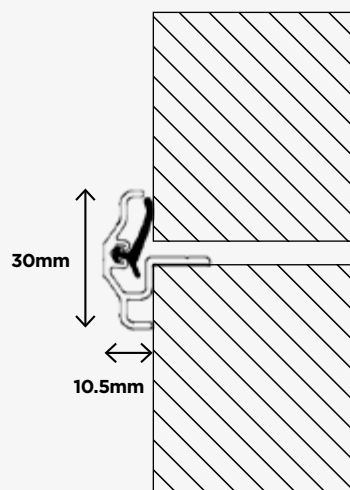

Roller Finger Guard

1.01.1560

- Quick and easy installation - designed for fast fitting
- Prevents finger trapping accidents in doors - ideal for schools, offices and public buildings
- Professional finish - durable, neat, blends seamlessly with any door design
- Fire Tested for 30 minutes to BS EN 1634-1:2014+A1 2018 and 60 minutes to BS 476-22:1987
- Tested in accordance with BS 8613:2017 - Class 2
- Length 1925mm
- Available in SAA, black and white



Concealed Fix Roller Finger Guard

- Concealed fixings offer a perfect solution for a multitude of different door applications. Blends seamlessly with any door design.
- Prevents finger trapping accidents in doors - ideal for schools, offices and public buildings
- Fire Tested for 30 minutes to BS EN 1634-1:2014+A1 2018 and 60 minutes to BS 476-22:1987
- Tested in accordance with BS 8613:2017 - Class 2
- Length 1925mm and 2015mm
- Available in SAA, black and white



Digitex Superior Front Finger Guard

1.10.0403

- Heavy duty front finger guard
- Prevents fingers being trapped
- Suitable for commercial applications
- Anodised Aluminium carrier with concealed fixings
- Fits most doors, prepacked with fixings
- In size 1925mm
- Available in white, brown, grey and black



Digitex Front Finger Guard

1.10.0401

- Prevents fingers being trapped
- Fits most doors
- Long Life
- Easily fitted
- Prepacked with fixings
- Fire tested for 30 min to BS EN 1634-1:2014
- In size 1925mm
- Available in white, brown and grey



Digitex Rear Finger Guard

1.10.0400


- Covers the rear hinges of a door preventing fingers getting trapped
- Fits most doors
- Long Life
- Easily fitted
- Prepacked with fixings
- In size 1925mm
- Available in white, brown & grey



Hingex Rear Finger Protector

1.10.0402



- Fits between rear door hinges preventing fingers getting trapped
- Fits most doors
- Long Life
- Self-adhesive, easily fitted
- In size 1800mm
- Available in silver & white

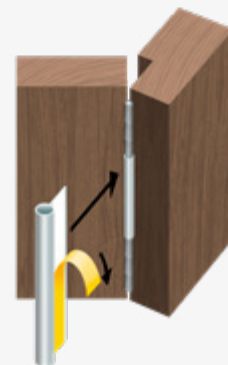

Industrial Brushstrips 90°

1.01.0196	90° Industrial Brushstrip with 25mm Bristle
1.01.0195	90° Industrial Brushstrip with 50mm Bristle
1.01.0194	90° Industrial Brushstrip with 80mm Bristle
1.01.0186	90° Industrial Brushstrip with 100mm Bristle
1.01.0187	90° Industrial Brushstrip with 120mm Bristle
1.01.0188	90° Industrial Brushstrip with 150mm Bristle
1.01.0189	90° Industrial Brushstrip with 200mm Bristle
1.01.0184	90° Industrial Brushstrip with 400mm Bristle (2000mm only)


- Ideal for Roller Shutters and most Industrial Doors
- Forms an effective draught seal and stops dust, leaves and insects. Deters rodents from entering
- Eliminates water ingress and noise pollution
- Suitable for data centres
- Reduces wasteful energy costs
- In sizes 1000mm to 3000mm
- Available in mill

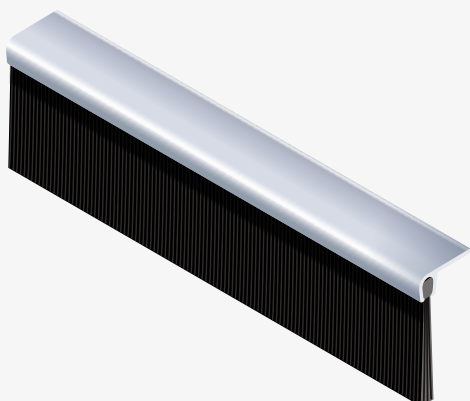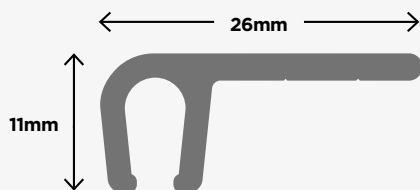

Industrial Brushstrip 180°

1.01.0087	180° Industrial Brushstrip with 25mm Bristle
1.01.0193	180° Industrial Brushstrip with 50mm Bristle
1.01.0075	180° Industrial Brushstrip with 80mm Bristle
1.01.0082	180° Industrial Brushstrip with 100mm Bristle
1.01.0076	180° Industrial Brushstrip with 120mm Bristle
1.01.0083	180° Industrial Brushstrip with 150mm Bristle
1.01.0084	180° Industrial Brushstrip with 200mm Bristle
1.01.0096	180° Industrial Brushstrip 50mm with 400mm Bristle

- Ideal for Roller Shutters and most Industrial Doors
- Forms an effective draught seal and stops dust, leaves and insects. Deters rodents from entering
- Eliminates water ingress and noise pollution
- Suitable for data centres
- Reduces wasteful energy costs
- In sizes 1000mm to 3000mm
- Available in mill, white and black

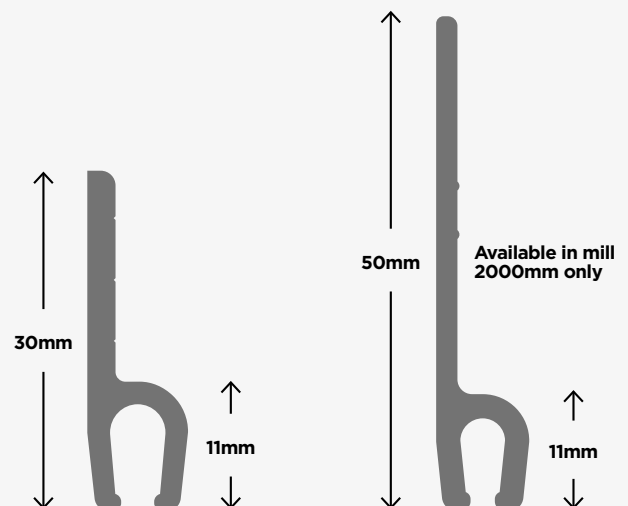

Seals for Insulated Roller Shutters


A Twin Pile Carrier (Available in black)

B Twin Pile Carrier Rebated (Available in grey)

- These profiles fit neatly onto roller shutter guides
- They effectively stop rattling shutters and draughts
- Can be fitted inside and outside

C U Channel

- This profile is designed to fit the bottom of the insulated Roller Shutter Door
- Designed to carry our Bottom D Rubber 18 x 22
- Available in 3m lengths
- Available in black and yellow

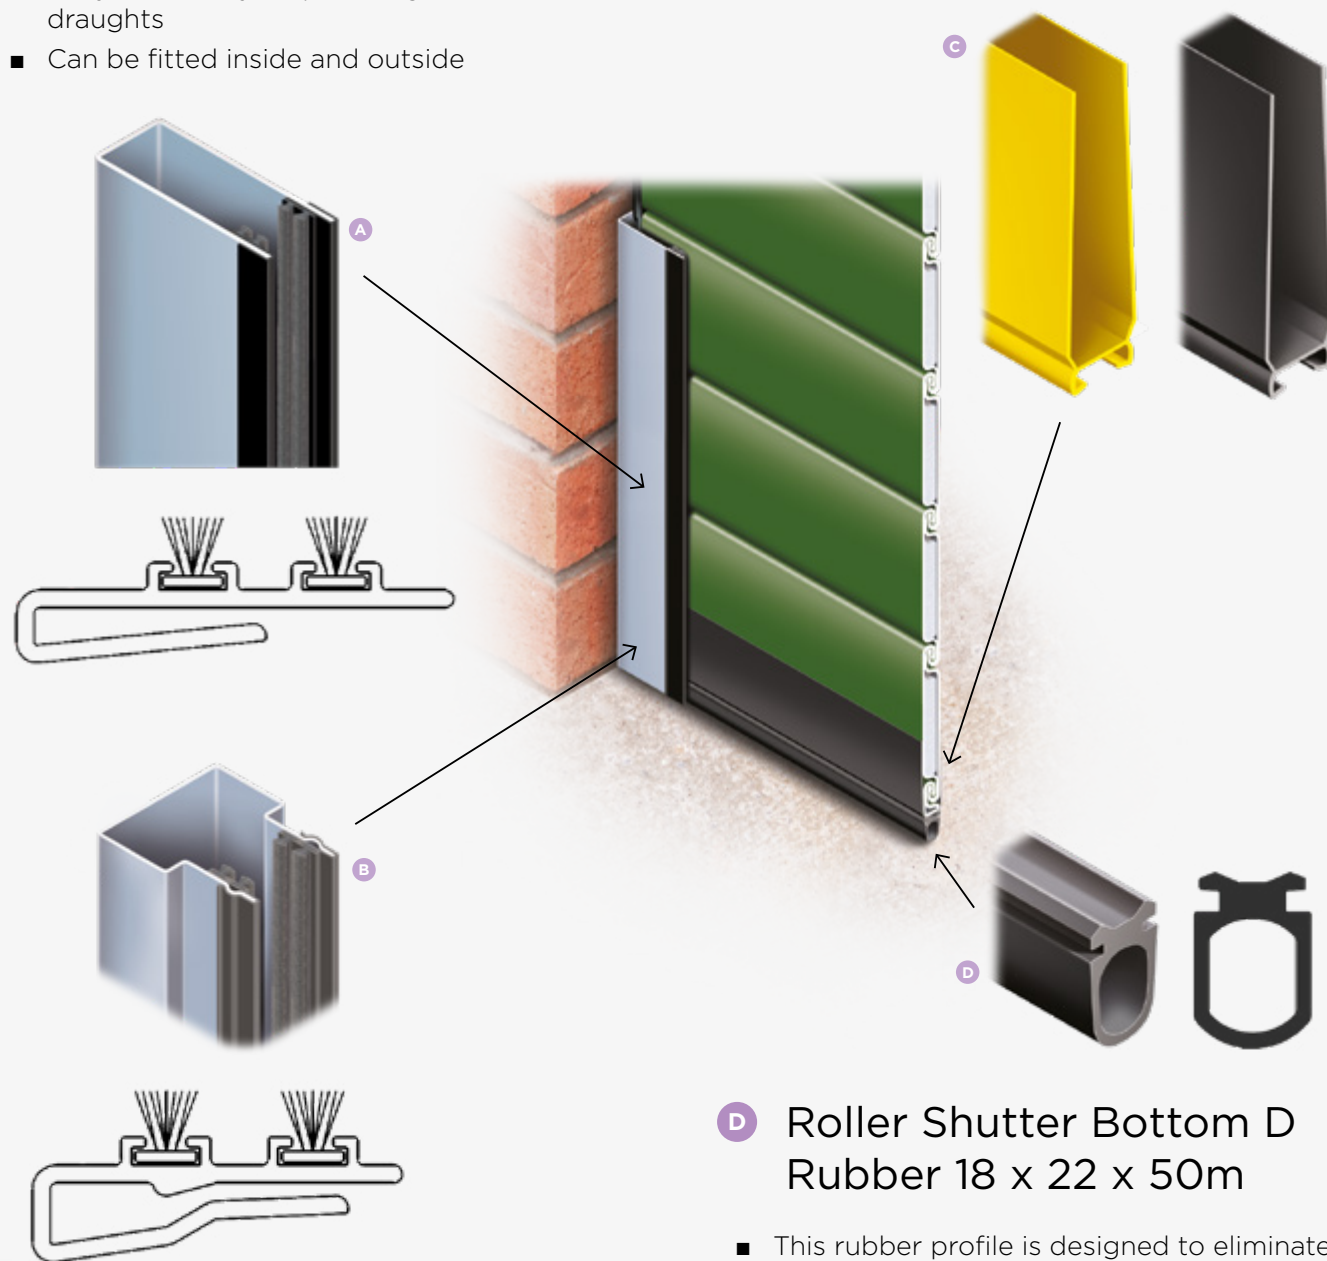

D Roller Shutter Bottom D Rubber 18 x 22 x 50m

- This rubber profile is designed to eliminate draughts, stop dust, leaves, insects and rodents from entering
- Designed to fit into our U Channel

Seals for Roller Shutters



TOP

A Industrial Brush Strip 3m

- Choice of Bristle Lengths
25mm, 50mm, 80mm, 100mm, 120mm,
150mm, 200mm, 400mm



Refer to page 25 for further details



SIDES

B Clip on angled black PVCU Carrier 3m with 30mm bristle


- Easy to install - simply clips neatly on to the shutter guide by creating a 45° angle, this profile seals onto the shutter lath, creating an effective seal
- A cost effective way to prevent dust, leaves, insects and rodents
- Available with a 30mm bristle in 3m lengths

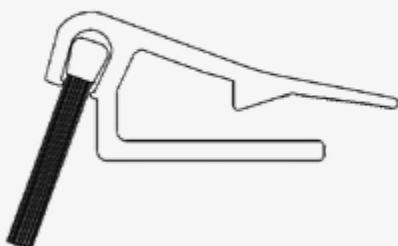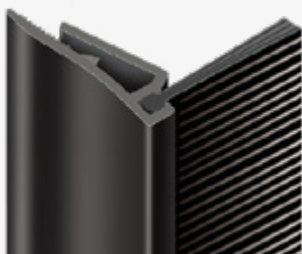

BOTTOM

C Bumper D Profile 89mm x 43mm

- Fits to all standard 75mm T Bars
- This seal reduces heat loss and helps stop water ingress
- Eliminates dust, leaves, insects and rodents
- EPDM Rubber
- Available in 20m rolls

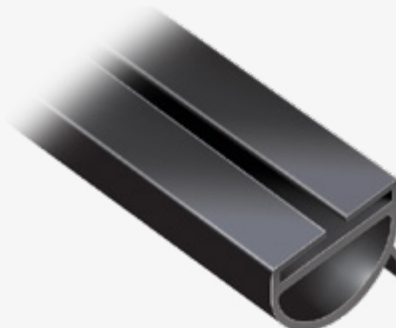



Exitex Limited

Dundalk, Ireland,
A91 HK29

+353 42 937 1244
info@exitex.com

exitex.com

