




Fire, Smoke & Acoustic

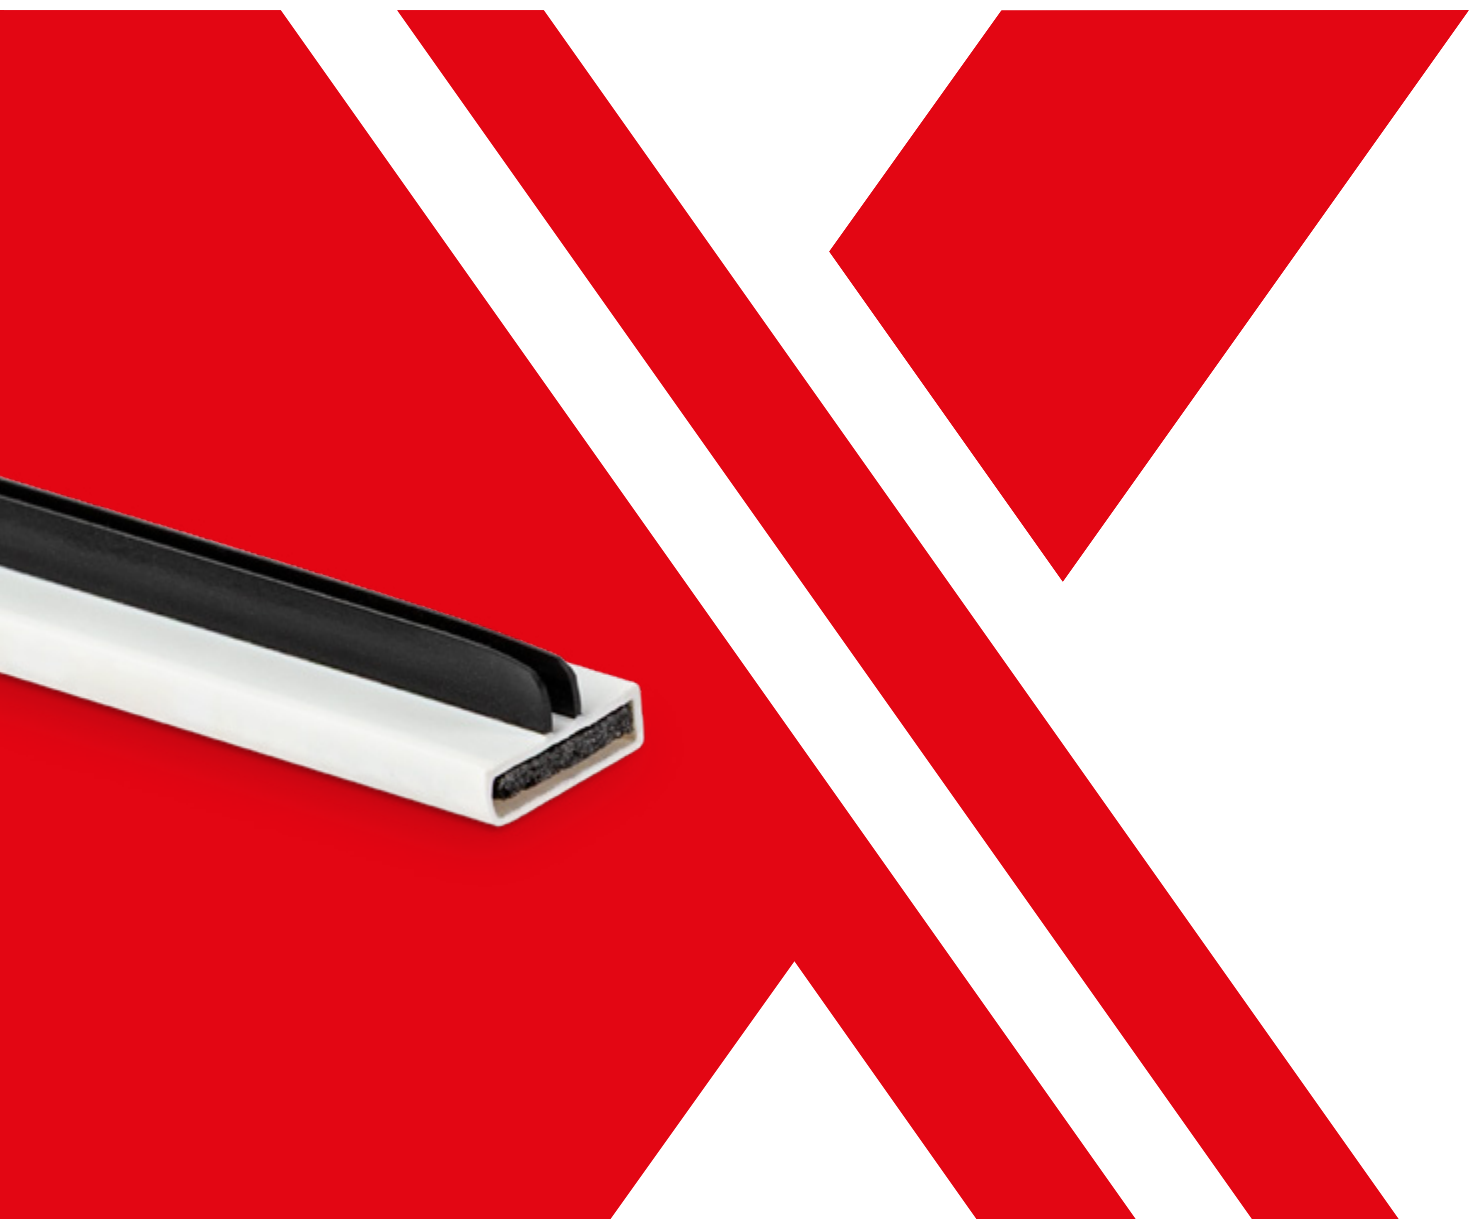

Engineered to deliver certified door performance where it matters most.

Fire protection is a vital part of every building, helping to safeguard lives, property and peace of mind. At Exitex we provide a comprehensive range of passive fire protection products to support compliant, reliable and high-performance fire door installations across residential, commercial and public sector projects.

This brochure showcases a carefully developed selection of fire safety solutions including Intumescent Strips, Ironmongery Protection, Drop Seals, Air Transfer Grilles, Fire Rated Gaskets, Intumescent Letterboxes and Fire Foam. Engineered to perform under demanding conditions, each product is designed to help contain fire and smoke, improve compartmentation and enhance the overall integrity of fire door systems.

Manufactured to meet the requirements of modern building standards, the Exitex fire protection range combines proven performance with ease of installation and long term durability. Whether you are a fabricator, installer, contractor, architect or specifier, our solutions provide the confidence and quality needed for every project.

Intumescent & Fire Sealing Systems

Intumescent seals that react under heat to protect door integrity.

Tested to recognised standards, supporting 30 and 60 minute classifications where specified.

Smoke Control Seals

Smoke seals engineered to restrict cold and ambient smoke in certified door sets.

Designed for consistent compression and controlled sealing performance.

Acoustic Sealing Solutions

Acoustic systems built for measurable sound reduction in high-performance doors.

Tested performance up to 43-44 dB (config-dependent), integrating with perimeter and dropdown seals.

Drop Seal Technology

Automatic drop seals for controlled bottom sealing in fire, smoke and acoustic doors.

Mortised and face-fixed formats, with selected models tested for certified performance.

CERTIFIRE Approved Fire, Smoke & Acoustic Sealing Systems

Independent third-party certification validating performance of selected drop seals and intumescent products in accordance with approved technical schedules.

certifire

Contents

Intumescent Seals	5
Exiblade	6
30 Minute Glazing	7
60 Minute Glazing	8
Ironmongery Protection	9
Lock Protection	10
Roller Finger Guards	12
Air Transfer Grilles & Faceplates	13
Fire Rated Thresholds	14
Intumescent Letterboxes	15
Self Adhesive Surface Mounted Intumescent Strip	16
Blue 60 Foam / Acoustic Acrylic Sealant	17
Dropdown Seals	18
Acoustic Seals	22
Display Stand	23





Intumescent Seals

Exitex Intumescent Seals provide a fire and smoke seal for fire rated timber doorsets and are suitable for both single and double doors. Our Seals are Certifire approved and have been Fire Tested to BS 476: Part 22, BS EN 1634-1 and Smoke Tested to BS 476: Part 31.1.

Fire only

1.31.0301


Profile Size	10mm x 4mm
Type	Fire Only
Fire Rating	30 mins
Lengths	1.05m & 2.1m
Colours	White / Brown / Black / Grey other colours available upon request

1.31.0303

Profile Size	15mm x 4mm
Type	Fire Only
Fire Rating	30/60 mins
Lengths	1.05m & 2.1m
Colours	White / Brown / Black / Grey other colours available upon request

1.31.0305

Profile Size	20mm x 4mm
Type	Fire Only
Fire Rating	60 mins
Lengths	1.05m & 2.1m
Colours	White / Brown / Black / Grey other colours available upon request

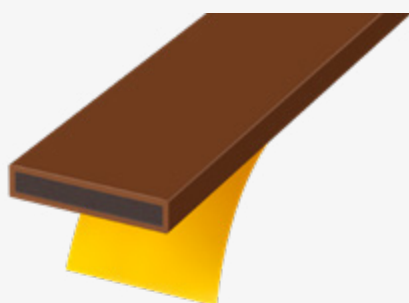

Fire & Smoke Seal

1.31.0302



Profile Size	10mm x 4mm
Type	Fire & Smoke
Fire Rating	30 mins
Lengths	1.05m & 2.1m
Colours	White / Brown / Black / Grey other colours available upon request

1.31.0304

Profile Size	15mm x 4mm
Type	Fire & Smoke
Fire Rating	30/60 mins
Lengths	1.05m & 2.1m
Colours	White / Brown / Black / Grey other colours available upon request

1.31.0306

Profile Size	20mm x 4mm
Type	Fire & Smoke
Fire Rating	60 mins
Lengths	1.05m & 2.1m
Colours	White / Brown / Black / Grey other colours available upon request

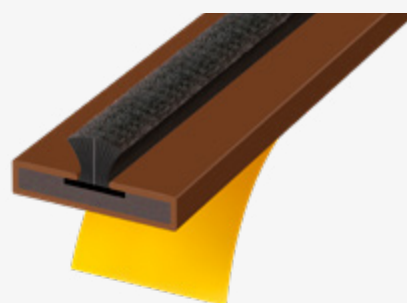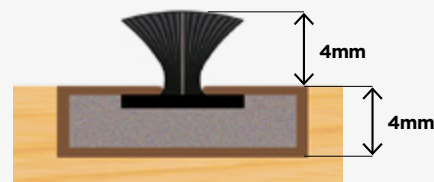

Exiblade

Exiblade Single and Twin Flipper Seals provide a fire, smoke and acoustic seal for fire rated timber doorsets and are suitable for both single and double doors. Our seals are Certifire approved and have been Fire Tested to BS 476: Part 22, BS EN 1634-1, Smoke Tested to BS 476: Part 31.1 and Acoustically Tested to up to 44dB to BS EN ISO 10140-2:2010.

Exiblade Single Flipper

1.31.0313



Profile Size	10mm x 4mm
Type	Fire & Smoke
Fire Rating	30 mins
Length	2.1m
Colours	White / Brown / Black / Grey other colours available upon request

1.31.0314

Profile Size	15mm x 4mm
Type	Fire & Smoke
Fire Rating	30/60 mins
Length	2.1m
Colours	White / Brown / Black / Grey other colours available upon request

1.31.0315

Profile Size	20mm x 4mm
Type	Fire & Smoke
Fire Rating	60 mins
Length	2.1m
Colours	White / Brown / Black / Grey other colours available upon request

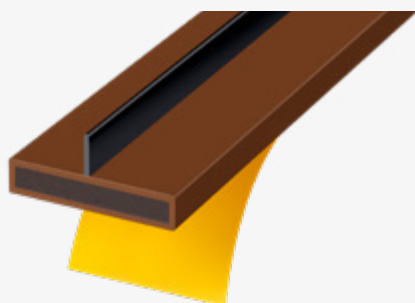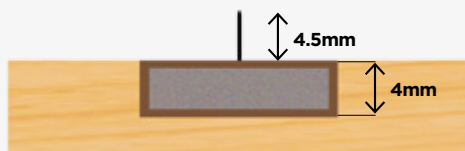

Exiblade Twin Flipper

1.31.0310


Profile Size	10mm x 4mm
Type	Fire & Smoke
Fire Rating	30 mins
Lengths	2.1m & 3m
Colours	White / Brown / Black / Grey other colours available upon request

1.31.0311

Profile Size	15mm x 4mm
Type	Fire & Smoke
Fire Rating	30/60 mins
Lengths	2.1m & 3m
Colours	White / Brown / Black / Grey other colours available upon request

1.31.0312

Profile Size	20mm x 4mm
Type	Fire & Smoke
Fire Rating	60 mins
Lengths	2.1m & 3m
Colours	White / Brown / Black / Grey other colours available upon request


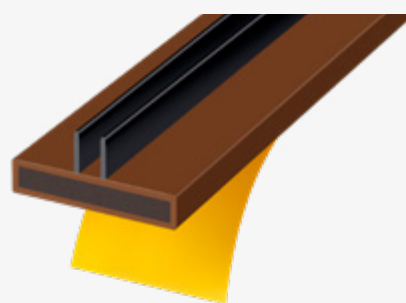


30 Minute Glazing

Exiglaze 30 gaskets have been specifically designed for use in glazed apertures in fire resisting timber doors. They have been fire tested to BS 476: Part 22 for 30 minutes with the following glass types: Pyrobelite 7 (AGC Flat Glass), 7mm thick Pyrodur Plus II (Pilkington), 7mm thick Pyroguard Clear (CGI), 7mm thick Sureglaze Insul (Halspan), 7.5mm thick Pyrodur Plus (Pilkington), 10mm thick Pyrodur (Pilkington), 11mm thick Pyroguard Clear (CGI), Pyrobelite 12 (AGC Flat Glass), 13mm thick Pyrodur (Pilkington).

Exiglaze 30 Self Adhesive



A specially formulated compressible gasket that has the ability to accommodate variances between door and glass thicknesses

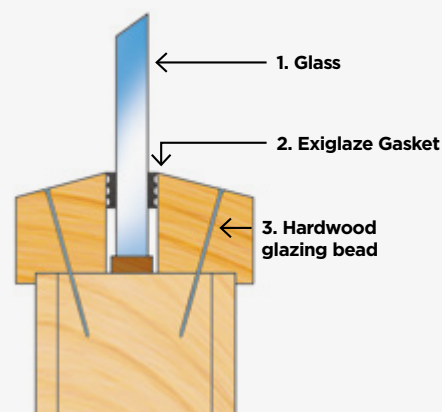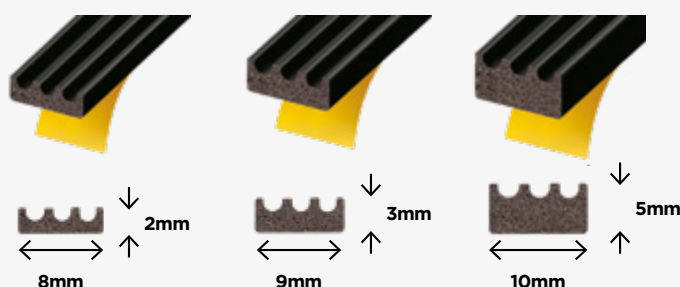

Profile Ref	Profile Size	Fire Rating	Lengths	Colours
1.31.0950.0200	2mm x 8mm	30 mins	200m	Black / White
1.31.0955.0150	3mm x 9mm	30 mins	150m	Black / White
1.31.0960.0100	5mm x 10mm	30 mins	100m	Black

Exiglaze 30 U Channel

A graphite based U Channel to suit 6/7mm glass

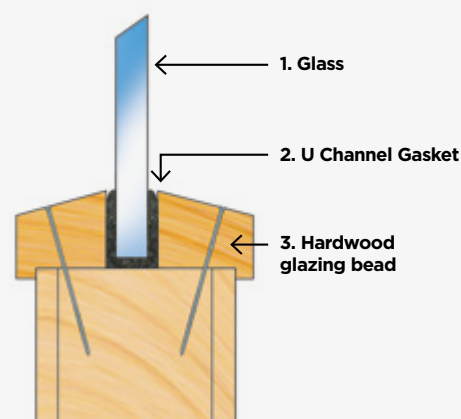
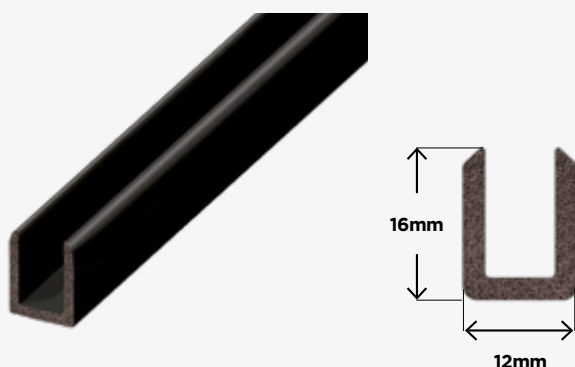


Profile Ref	Profile Size	Fire Rating	Lengths	Colours
1.31.0880.0100.00	12mm x 16mm	30 mins	100m	Black

60 Minute Glazing

Exiglaze 60 and Exiglaze 60 F1 are 3 part glazing solutions for glazed apertures within timber fire doors. Fire Tested to BS 476: Part 22 for 60 minutes. These systems have been designed to overcome the problems in 60 minute applications using non-insulated glass which results in high temperatures and therefore erosion of the door and bead during fire testing. Exiglaze 60 F1 incorporates two integral glazing fins to accommodate tolerance variations in both glass and door cores, whilst maintaining sufficient compression of the glass and maintaining a low visual sightline.



Exiglaze 60

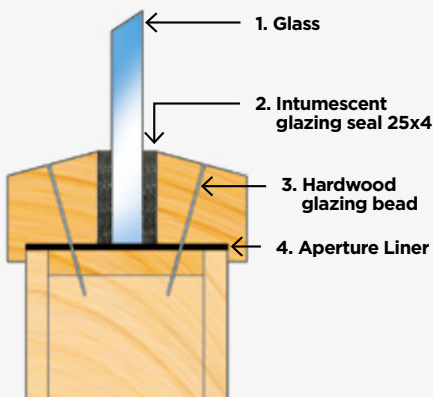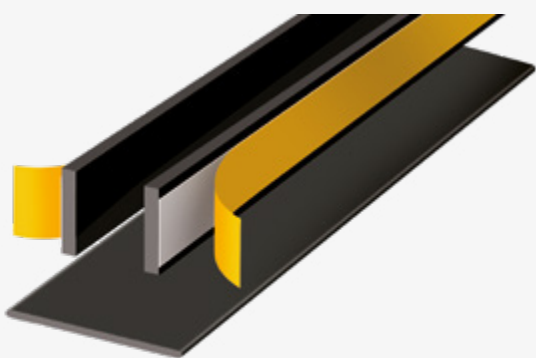

Profile Ref	Fire Rating	Lengths	Colours
1.31.0860.2100	60 mins	2.1m	Black / White

Consisting of 1 number Intumescent Aperture Liner 1mm x 53mm and 2 number 25mm x 4mm moderate expansion Intumescent Glazing Seals.

Exiglaze 60 F1

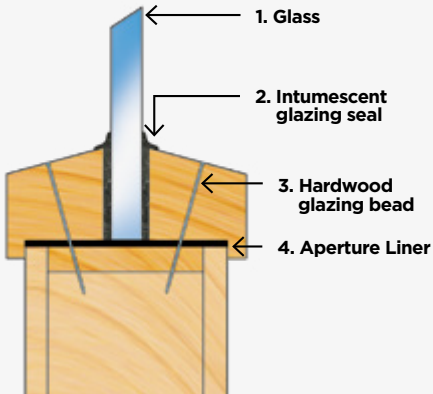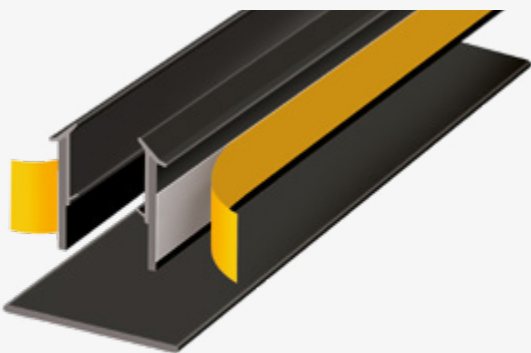

Profile Ref	Fire Rating	Lengths	Colours
1.31.0850.2100	60 mins	2.1m	Black

Consisting of 1 number Intumescent Aperture Liner 1mm x 53mm and 2 number 25mm x 4mm moderate expansion Intumescent Glazing Seals.

Exifire Ironmongery Protection

Exifire Ironmongery Protection is manufactured from a high performance flexible Intumescent Sheet. Fire tested to BS 476: Part 22 and BS EN 1634-1 for both 30 & 60 minute applications (Dependant on product requirement). Exifire Ironmongery Protection protects ironmongery installed on fire doors without compromising the integrity of the fire door assembly. Bespoke kits can be manufactured to suit most ironmongery.

Hinge Protection - Radius Corner

1.31.0829.0000.00

Radius Corner S/A Hinge Pad
100mm x 25mm x 1mm

1.31.0826.0031.00

Radius Corner S/A Hinge Pad
100mm x 31mm x 1mm

1.31.0878.0031.00

Radius Corner S/A Hinge Pads
100mm x 31mm x 2mm

1.31.0855.0035.00

Radius Corner S/A Hinge Pads
100mm x 35mm x 1mm




Hinge Protection - Square Corner

1.31.0809.0000.00

Square Corner S/A Hinge Pad
75mm x 25mm x 1mm

1.31.0827.0031.00

Square Corner S/A Hinge Pad
100mm x 31mm x 1mm

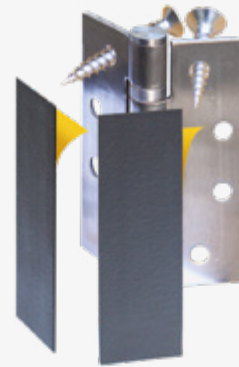

Tubular Latch Protection

1.31.0824.0024.00

Universal Tubular Latch Kit

1.31.1050.0024.00

Tubular Latch Kit 64/76mm
Backset c/w Large Strike Plate



Universal Flush Bolt Kits

To suit both Square & Radius Ends

1.31.0840.0200.00

Universal Flush Bolt Kit
150/200mm

1.31.0841.0450.00

Universal Flush Bolt Kit
300/450mm

1.31.0842.0900.00

Universal Flush Bolt Kit
600/900mm



Lock Protection

Exifire Lock protection is manufactured from a high performance 1mm flexible Intumescent Sheet. Fire tested to BS 476: Part 22 and BS EN 1634-1 for both 30 & 60 minute applications (Dependant on product requirement). Exifire Lock protection protects ironmongery installed on fire doors without compromising the integrity of the fire door assembly. Bespoke kits can be manufactured to suit most ironmongery.

Sashlock Kits

1.31.0820.0105.00

Universal BS Sashlock Kit to suit 64/76mm backset

1.31.0888.0000.00

APE 45mm Sash Lock Kit

- Complete with strike plate



Din Lock Kits

1.31.0822.0165.00

Universal Din Lock Kit to suit 55/60 backset

1.31.0887.0000.00

Arrone 60mm Din Lock Kit

1.31.0867.0000.00

Zoo 55-60 Din Sashlock Kit

- Complete with strike plate



Deadlock Kits

1.31.0821.0075.00

Universal BS Deadlock Kit to suit 64/76mm backset

1.31.0825.0080.00

Universal FB1/2 Deadlock Kit to suit 105mm backset

- Complete with strike plate



Multilock Kits

1.31.0823.0000.00

Universal Intumescent SBD Multilock Kit

1.31.0832.0220.00

Intumescent Fullex CRB 220 Pro Lock Kit

1.31.0857.0000.00

Intumescent Fullex XL CRB 45mm BS lock + 1mm keep pad kit

1.31.1000.0000.00

Intumescent Fullex Auto Slamlock Multipoint 55mm Back Set Kit

1.31.0838.0000.00

Yale Lockmaster 45-BS 2 hook Lock Kit

1.31.0859.0000.00

Intumescent Winkhaus AV2/AV3 45mm-BS lock + keeps kit



Door Viewer

1.31.0920.0014.31

Exifire 14mm Door Viewer
(35-55mm)

- Our fire resistant door viewer has gone through rigorous testing to DHF TS002:2009 which covers corrosion resistance, security (angle of vision), visual clarity, resistance to misting up, ability to clear after misting, length adjustment range and marking
- Available in gold, SAA and chrome




Self Adhesive Intumescent Sheets

1.31.0830.0300.00

300mm x 200mm

- A high performance flexible 1mm thick Intumescent sheet for both 30 and 60 minute applications

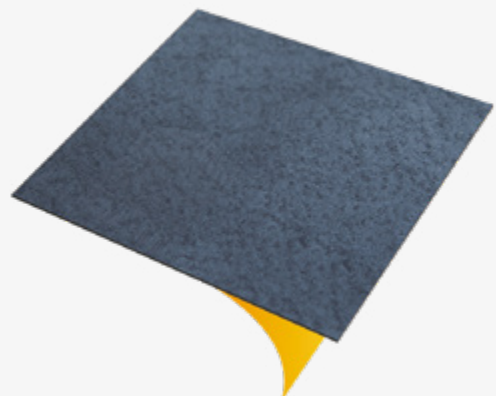

Roller Finger Guards

Roller Finger Guards are designed to provide effective protection against finger-trapping injuries at door hinge areas. Available with either visible or concealed fixing options which are fire tested to 30 & 60 minutes.

Roller Finger Guard

1.01.1560

- Quick and easy installation - designed for fast fitting
- Prevents finger trapping accidents in doors - ideal for schools, offices and public buildings
- Professional finish - durable, neat, blends seamlessly with any door design
- Fire Tested: for 30 minutes to BS EN 1634-1:2014+A1 2018 and 60 minutes to BS 476-22:1987
- Tested in accordance with BS 8613:2017 - Class 2
- Length 1925mm
- Available in SAA, black and white



Concealed Fix Roller Finger Guard

- Concealed fixings offer a perfect solution for a multitude of different door applications. Blends seamlessly with any door design
- Prevents finger trapping accidents in doors - ideal for schools, offices and public buildings
- Fire Tested: for 30 minutes to BS EN 1634-1:2014+A1 2018 and 60 minutes to BS 476-22:1987
- Tested in accordance with BS 8613:2017 - Class 2
- Length 1925mm and 2015mm
- Available in SAA, black and white



Fire Rated Intumescent Air Transfer Grilles & Faceplates

Exitex offer a comprehensive range of fire rated Air Transfer Grille systems for use in timber fire doorsets for up to 60 minutes fire resistance.

In normal use the Exitex system is designed to allow air to be circulated throughout the building. In the event of a fire the system will close and provide a fire barrier to restrict the passage of hot gasses.

Tested to BS 476: Part 22 for both 30 & 60 minutes.

Air Transfer Grilles

- Grilles are of robust construction. The frames are constructed from mild steel. Modular construction allows free airflow
- Easily installed and maintenance free

Product Ref	Description	Dimensions	Free Air Flow
1.31.0401.0000.31	Intumescent Air Transfer Grille	150mm x 150mm x 40mm	153 sq cms
1.31.0402.0000.31	Intumescent Air Transfer Grille	150mm x 300mm x 40mm	307 sq cms
1.31.0403.0000.31	Intumescent Air Transfer Grille	300mm x 300mm x 40mm	614 sq cms
1.31.0404.0000.31	Intumescent Air Transfer Grille	450mm x 450mm x 40mm	1337 sq cms
1.31.0405.0000.31	Intumescent Air Transfer Grille	600mm x 600mm x 40mm	2448 sq cms



Faceplates

- Faceplates are constructed from mild steel and powdercoated
- Supplied complete with fixing screws

Product Ref	Description	Dimensions	Free Air Flow
1.31.0421.0000.31	Faceplate to suit 150mm x 150mm	200mm x 200mm	150 sq cms
1.31.0422.0000.31	Faceplate to suit 150mm x 300mm	200mm x 345mm	295 sq cms
1.31.0423.0000.31	Faceplate to suit 300mm x 300mm	345mm x 345mm	593 sq cms
1.31.0424.0000.31	Faceplate to suit 450mm x 450mm	495mm x 495mm	1262 sq cms
1.31.0425.0000.31	Faceplate to suit 600mm x 600mm	645mm x 645mm	2308 sq cms




Fire Rated Thresholds

Exitex fire rated thresholds, tested to BS EN 1634 for 30 minutes in both directions.

FD30 MXS 15/2

1.01.0393

- In sizes 914mm to 2134mm
- Available in bright silver, gold and black

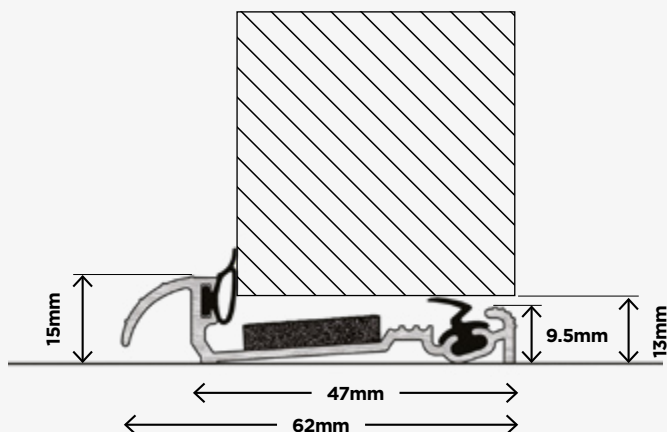

FD30 MXS 15/67 & MXS 15/72

1.01.0394

FD 30 MXS 15/67


A

1.01.0403

FD 30 MXS 15/72

B

- In sizes 870mm to 2134mm
- Available in bright silver and gold

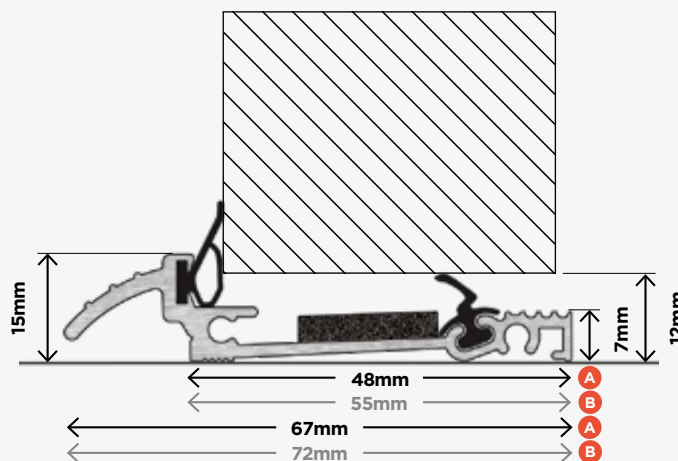

Intumescent Letterboxes


Exitex offer a range of 30 & 60 minute framed telescopic letterboxes with metal flaps, internal draught excluders, external weatherseal and fitted with a high performance Intumescent liner.

These are available in both 10" standard and 12" commercial sizes with a range of finishes.

30 Minute

1.31.0903.0000.15	Intumescent Letterbox 10" FD30 Polished Gold
1.31.0903.0000.31	Intumescent Letterbox 10" FD30 SAA
1.31.0903.0000.71	Intumescent Letterbox 10" FD30 Polished Silver
1.31.0905.0000.15	Intumescent Letterbox 12" FD30 Polished Gold
1.31.0905.0000.31	Intumescent Letterbox 12" FD30 SAA
1.31.0905.0000.71	Intumescent Letterbox 12" FD30 Polished Silver

- ABS framed telescopic letter box (black frame)
- Fire Tested: to BS EN 1643-1

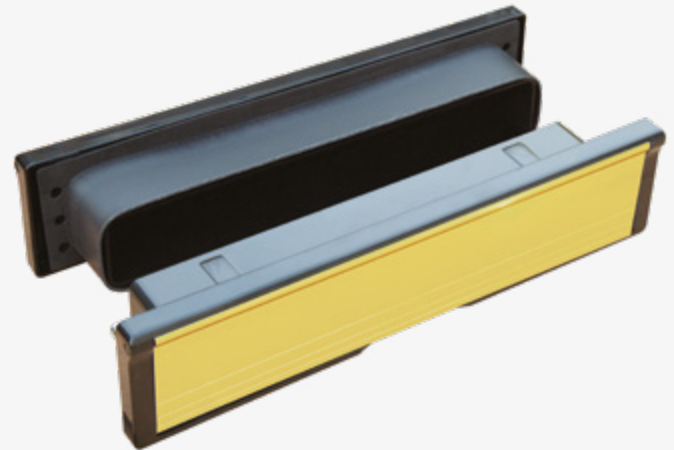

60 Minute

1.31.0907.0000.31	Intumescent Letterbox 12" FD60 SAA
1.31.0907.0000.71	Intumescent Letterbox 12" FD60 Polished Silver

- Robust commercial framed telescopic letterbox
- Fire Tested: to BS 476: Part 22 Fire Rating 30/60 Mins





Self Adhesive Surface Mounted Intumescent Strip

1.31.0932.5200

- Suitable for gaps 2mm-4mm, colour coded brush
- Tested for 30 minutes to BS 476: Part 22
- Retrofit for speedy installation
- No routing of door or frame
- Alcohol wipe & fire door stickers enclosed
- Available in white, brown and grey



Width - 25mm
Thickness - 1.8mm
Pile Height - 5mm

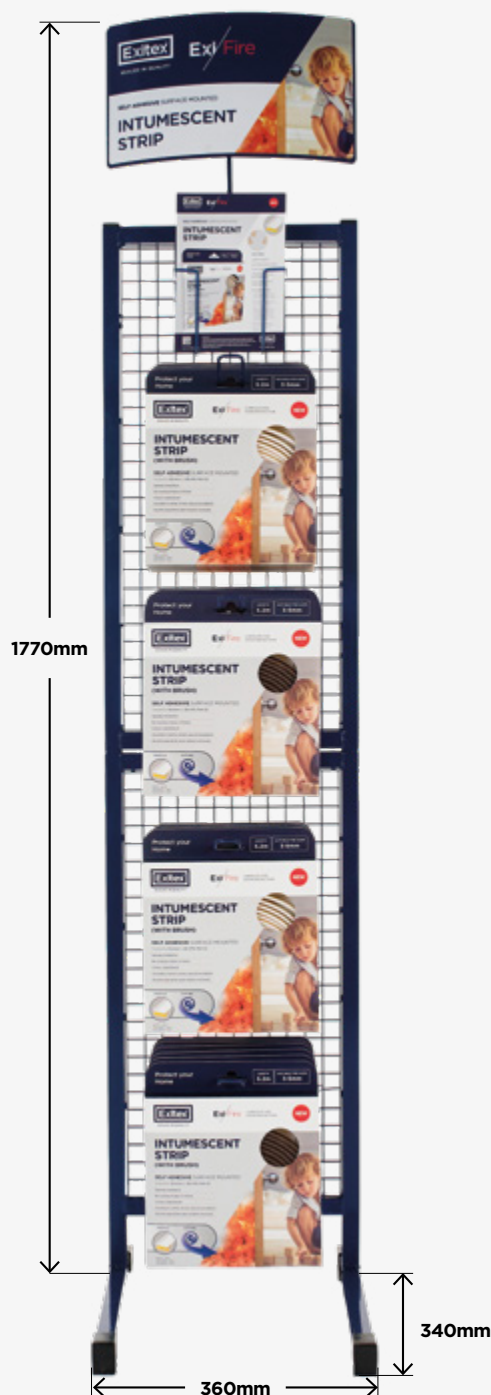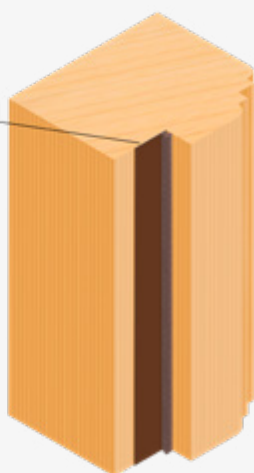

Important

The Surface Mounted Intumescent Strip should only be fitted to timber door leaves and framing material that have been successfully tested for a period of 30 minutes in accordance with the criteria of BS 476 Part:22 1987. The fire door keep shut signage should be fitted to comply with BS 5499-5:2002 in accordance with approved document B Volume 2, appendix B clauses 8 & 9.

Blue 60 Fire Foam & Accessories

Blue 60 is a specially formulated expanding foam that achieves up to 60 minute fire protection for timber fire doorsets. 30 & 60 minute fire tested to BS EN 1634-1 & BS 476: Part 22.

Blue 60 Fire Rated Frame Foam


1.31.0600.0750.01 Gun Grade (750ml)

- Tested in full size single & double doorsets
- Tested in both metal and timber stud partitionings
- Tested with softwood, MDF & hard woodframe sections
- Tested with gaps between 7mm & 30mm
- Blue in colour for identification purposes
- 1mm, 3mm & 5mm colour co-ordinated fire rated packers available



1.31.0701.0015.20

- Fire Rated Packer
- 1mm x 15mm x 100mm
- Green




1.31.0703.0015.35

- Fire Rated Packer
- 3mm x 15mm x 100mm
- White



1.31.0705.0015.01


- Fire Rated Packer
- 5mm x 15mm x 100mm
- Blue

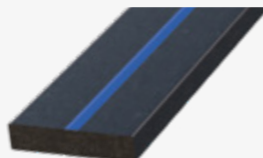

Exi-Wood Wedge Packers 80mm (2-15mm)

1.42.1000.0080.65

- Manufactured from a non combustible composite PVC/timber material that does not easily melt, burn or contribute to the spread of fire when used in conjunction with Blue 60 foam with a fire rating of up to 60 minutes

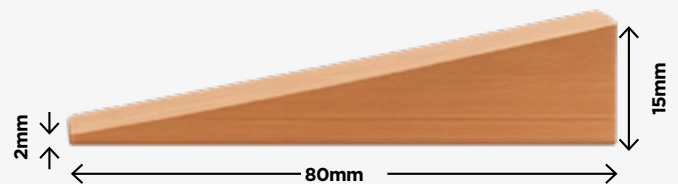

Fire Rated Intumescent Acoustic Acrylic Sealant

1.18.0500.0310.35 310ml

1.18.0501.0600.35 Foil packed 600ml

- For sealing linear gap seals and small floor / wall penetrations. Achieved 55 DB RW. Fire tested to BS 476: Part 20 & 22 and tested to BSEN ISO 140/3
- Fire Rating: 240 mins
- Available in white





Fire Rated Dropdown Seals

The Exitex range of drop seals provide an effective solution for improving acoustic performance, thermal insulation, smoke containment, and draught control in door systems. Designed to automatically seal the gap between the bottom of the door and the floor when the door closes, drop seals are suitable for commercial, residential, healthcare, hospitality, and educational environments. Available in a variety of sizes the range includes options for timber, metal, and glass doors, with models tailored for surface-mounted, rebated, and heavy-duty applications. Combining durability with discreet operation, drop seals help enhance comfort, energy efficiency, and compliance with modern building standards.

Concealex A8100

1.50.0031


- Application: suitable for all types of single action doors
- Maximum drop 14mm
- Fixing: with screws supplied
- Adjustment: standard phillips screwdriver
- Self-levelling
- Co-extruded bubble seal in self-extinguishing PVC
- Fire Tested: for 30 & 60 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested: to BS EN 1634-3:2004
- Acoustic Tested: up to 44dB to BS EN ISO 10140-2:2010
- In sizes: 330mm, 426mm, 526mm, 626mm, 726mm, 826mm, 926mm, 1026mm, 1130mm, 1230mm, 1330mm and 1430mm
- Available in SAA
- Trimming lengths - (on the opposite side to the plunger)
330mm & 426mm can be trimmed by up to 50mm only
526mm and above - can be trimmed by up to 150mm

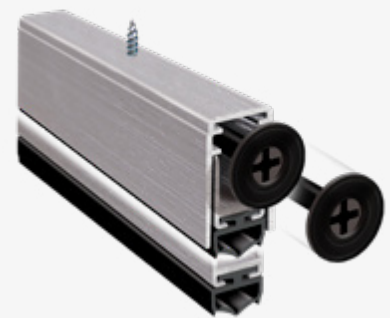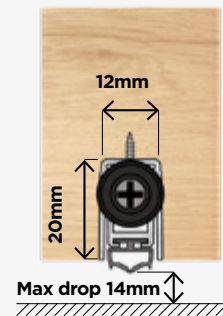

Concealex A8100 Superior

1.50.0005

- Application: suitable for all types of single action doors
- Maximum drop 17mm
- Fixing: with stainless steel bracket
- Adjustment: plunger with adjustable spring
- Self-levelling
- Sound insulating seal in co-extruded tubular TPE
- Fire Tested: for 30 & 60 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested: to BS EN 1634-3:2004
- Acoustic Tested: up to 44dB to BS EN ISO 10140-2:2010
- In sizes: 330mm, 426mm, 526mm, 626mm, 726mm, 826mm, 926mm, 1026mm, 1130mm, 1230mm, 1330mm and 1430mm
- Available in SAA
- Trimming lengths - (on the opposite side to the plunger)
330mm - can be trimmed by up to 20mm only
426mm - can be trimmed by up to 50mm only
526mm and above - can be trimmed by up to 150mm

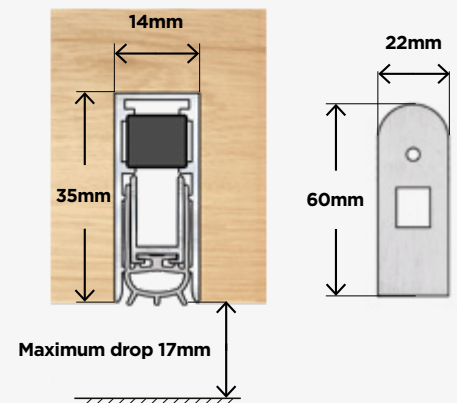


Concealex Facefix



1.50.0010

1.12.0700

Facefix Bumper Kit available to allow fitting of Dropseal on inside of door




- Application: suitable for all types of single action doors
- Maximum drop 14mm
- Fixing: surface mounted screw fix with aluminium clip on cover with nylon cap
- Plunger adjustable with a 3mm Allen Key
- Self-levelling
- Co-extruded bubble seal in self-extinguishing PVC
- Fire Tested for 30 & 60 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested: to BS EN 1634-3:2001
- Acoustic Tested: up to 43DB to BS EN ISO 10140-2:2010
- In sizes 330mm, 430mm, 530mm, 630mm, 730mm, 830mm, 930mm, 1030mm, 1130mm, 1230mm, 1330mm
- Available in SAA
- Trimming lengths - (on the opposite side to the plunger)
330mm, 430mm & 530mm - can be trimmed by up to 50mm only
630mm and above - can be trimmed by up to 150mm

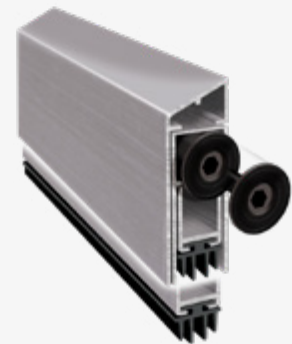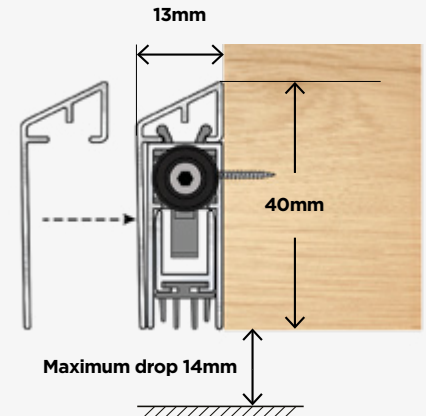

Concealex Slimline Facefix

1.50.0008


- Application: suitable for all types of single action doors
- Maximum drop 15mm
- Fixing: surface mounted screw fix with PVC clip on cover
- Adjustment: standard phillips screwdriver
- Self-levelling
- Sound insulating Silicone Rubber seal
- Fire Tested for 60 min to BS EN 1634-1:2014
- In size: 830mm, 930mm, 1030mm
- Available in SAA
- Trimming lengths: up to 100mm on the opposite side to the plunger

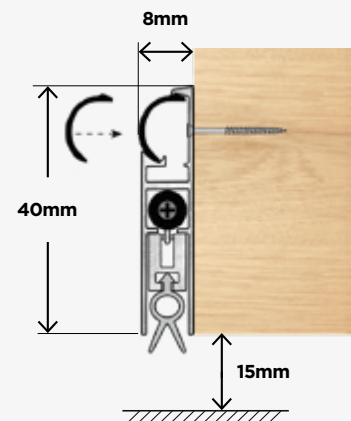

Concealex 13mm x 28mm

1.50.0080


- Application: suitable for all types of single action doors
- Maximum drop 14mm
- Fixing: with screws supplied
- Plunger adjustable with a 3mm Allen Key
- Self-levelling
- Sound insulating bubble seal in co-extruded TPE
- Fire Tested for 30 & 60 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested To BS EN 1634-3:2004
- Acoustic Tested
- In sizes: 330mm, 426mm, 526mm, 626mm, 726mm, 826mm, 926mm, 1026mm, 1130mm, 1230mm, 1330mm and 1430mm
- Available in SAA
- Trimming Lengths - (on the opposite side to the plunger)
330mm, 426mm & 526mm - can be trimmed by up to 50mm only
626mm and above - can be trimmed by up to 150mm

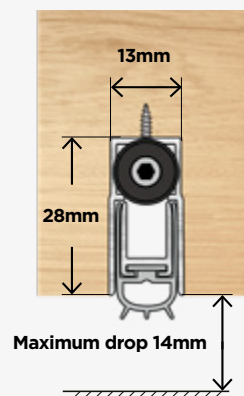

Concealex 15mm x 28mm

1.50.0060



- Application: suitable for all types of single action doors
- Maximum drop 14mm
- Fixing: with screws supplied
- Plunger adjustable with a 3mm Allen Key
- Self-levelling
- Sound insulating bubble seal in co-extruded TPE
- Fire Tested for 30 & 60 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested To BS EN 1634-3:2004
- Acoustic Tested
- In sizes: 330mm, 426mm, 526mm, 626mm, 726mm, 826mm, 926mm, 1026mm, 1130mm, 1230mm, 1330mm and 1430mm
- Available in SAA
- Trimming Lengths - (on the opposite side to the plunger)
330mm, 426mm & 526mm - can be trimmed by up to 50mm only
626mm and above - can be trimmed by up to 150mm

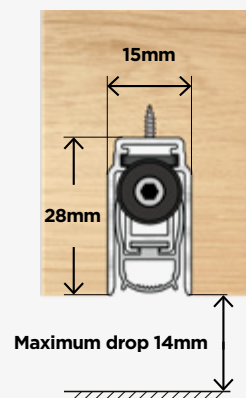

Concealex Facefix for Glass Doors

1.50.0036


- Application: for swing glass doors
- Maximum drop 15mm
- Fixing: with high strength Double Sided Tape
- Self levelling
- Co-extruded bubble seal in self-extinguishing PVC
- In sizes: 826mm, 926mm, 1026mm
- Available in SAA
- Trimming Lengths: up to 115mm on the opposite side to the plunger

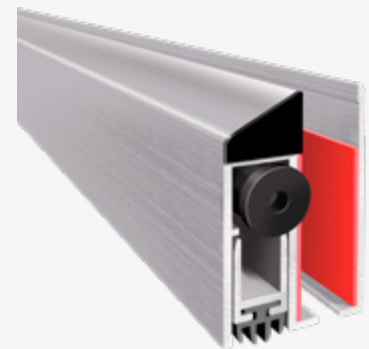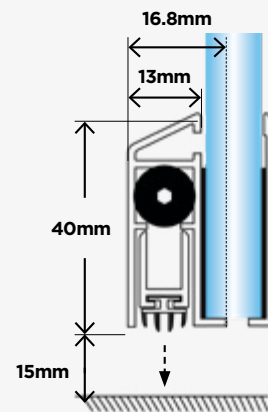

Decoration
Cover




Press support

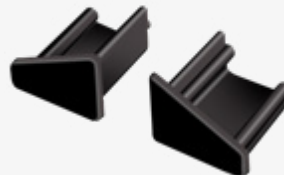

L & R endcap



Lower endcap

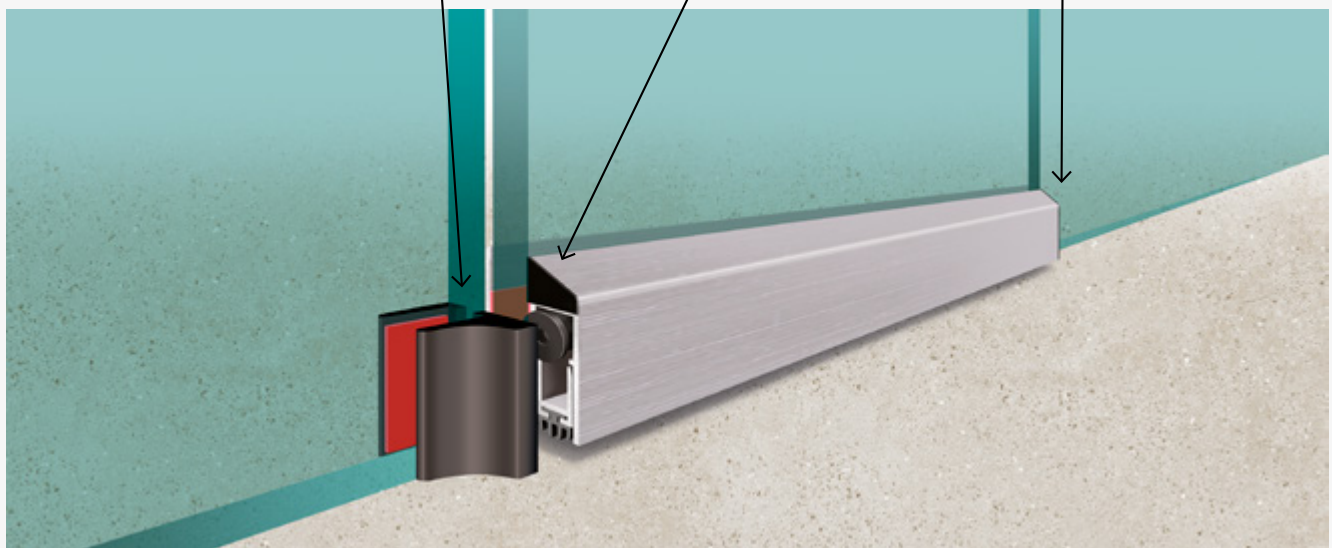


Acoustic Door Seals

Exitex high-performance acoustic door seals are designed to reduce noise transfer while also reducing draughts, dust, and heat loss. These seals are designed to be fitted across the top and vertical sides of the door to be used as cold smoke seals.

Twin Flipper (Pushfit)

1.10.0512


- Application: All types of timber doors
- Material: Co-extruded rigid base with flexible blades
- Fixing: Pushfit into a 3mm machined groove
- Fire tested: for 30 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested: to BS EN 1634-3:2004
- Acoustic Tested: up to 44DB to BS EN ISO 10140-2:2010
- In sizes 2.1m & 3m
- Available in white and brown

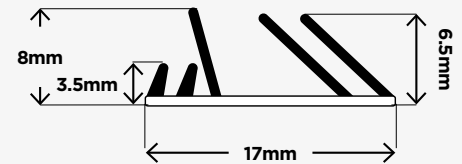

Twin Flipper (Self Adhesive)

1.10.0500


- Application: All types of timber doors
- Material: Co-extruded rigid base with flexible blades
- Fixing: Self-adhesive tape
- Fire tested: for 30 min to BS EN 1634-1:2014 and BS 476: Part 22
- Smoke Tested: to BS EN 1634-3:2004
- Acoustic Tested: up to 44DB to BS EN ISO 10140-2:2010
- In sizes 2.1m & 3m
- Available in white, brown, black and grey

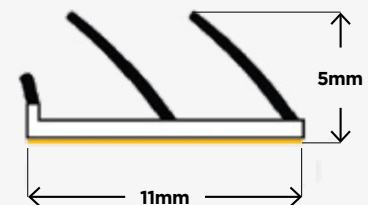

V Flap Elite

1.10.0516


- Application: All types of timber doors
- Material: Co-extruded with flexible blades
- Fixing: Self-adhesive tape
- Smoke Tested: to BS EN 1634-3:2004
- Acoustic Tested: up to 43DB to BS EN ISO 10140-2:2010
- In size 2.1m
- Available in white, brown and black

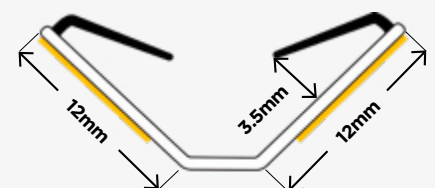

Exifire Intumescent Display Stand

The Exifire Intumescent Display Stand & Stock has been specifically developed for builder's merchants and Architectural Ironmongers showrooms.

The Intumescent products contained within the stand are attractively packed for retail sale and the contents of the stand cater for both FD30 and FD60 requirements with full testing on all products.

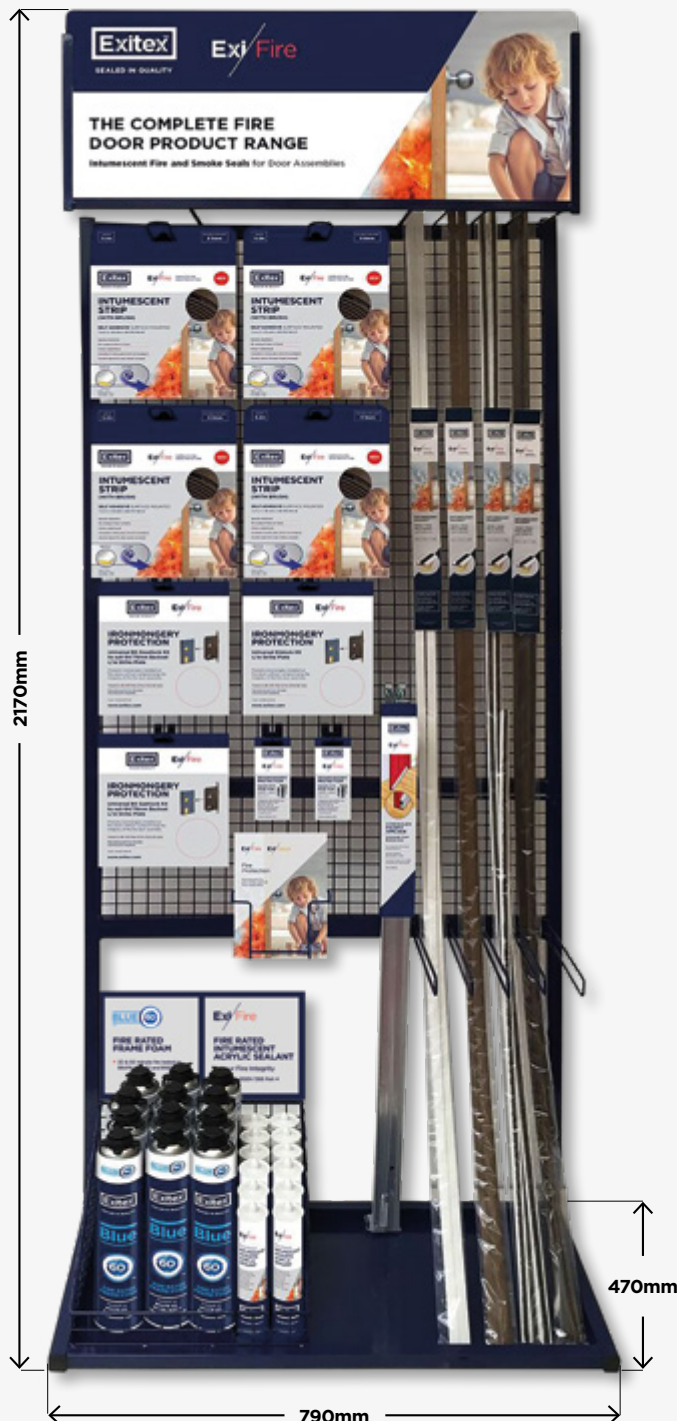

Contains

24 x	S/A Surface Mounted Intumescent with Pile
12 x	Retail Universal Sashlock Kit
12 x	Retail Universal DIN Lock Kit
12 x	Retail Universal Deadlock Kit
24 x	Retail Pack of 6 Exifire Square S/A Hinge Pads
10 x	Retail Concealex Facefix Dropseal 930mm
12 x	Blue 60 Fire Foam
12 x	Fire Rated Intumescent Acrylic Sealant 310ml
24 x	Intumescent Door Pack Fire Only 10 x 4
24 x	Intumescent Door Pack Fire & Smoke 10 x 4
24 x	Intumescent Door Pack Fire Only 15 x 4
24 x	Intumescent Door Pack Fire & Smoke 15 x 4
<i>(each Intumescent Door Pack contains 2 x 2.1m & 1 x 1.05m)</i>	



Exitex Limited

Dundalk, Ireland,
A91 HK29

+353 42 937 1244
info@exitex.com

exitex.com